

EXCEL TACT LIMITED

滿威有限公司



SAFETY FIRST

香港新界荃灣錦德街11號宏龍工業大廈24樓2401室
Room 2401, Wang Lung Industrial Building,
No. 11 Lung Tak Street, Tsuen Wan, N.T., Hong Kong

Tel: (852) 2898 8198
Email: info@excelltact.com.hk

Fax: (852) 2898 8702
Website: www.excelltact.com.hk



**KOREL®**

EN 397 : 2012

2



下顎帶



■ KCS-7D



■ KCS-7A



■ KCS-7B



■ KCS-5A



■ KCS-6

配件



■ Neck protector
防曬領巾100%防紫外光



■ Brim N Shade
防UV遮擋保護100%防紫外光



■ KNP-1
防曬頸巾



可選轉子或易拉索帶



■ KHL 電池式
150 流明

■ KHLC 充電式
220/250流明



■ NR-CG防曬冰感頸巾



■ NRC 330



■ NR-CHP 冰感內帽



■ 面片



■ 不銹鋼絲網面罩



■ 燒焊面罩



■ 耳罩EP167
NRR:30 dB



顏色

STANDARD colours



HI-VIZ colours



SPECIAL colours



MATT colours



■ NTA-H 攀爬/救援安全帽



- 短帽檐設計, 視野寬闊
- 集成防撞擊安全眼罩
- 滌綸絲下顎帶, 柔軟舒適
- TPE下巴托
- 側向剛性, 電絕緣

■ 織帶 (內膽加轉子)

TOPSAFE

SH0411



■ Y形下顎帶設計

■ 8點式尼龍織帶內胆

CENTURION



■ 1100 RP

■ Concept S08

■ S10 Plus
連伸縮護目鏡

防撞帽 Bump cap (室內及運動型) EN812標準

DELTA PLUS



■ 102110 JA (7cm)



■ 102110 BM (7cm)



■ 102150 BM (5cm)



■ 102130 GR (3cm)

JSP



■ Top Cap



■ Hardcap

BLUEEAGLE
Safety and health



藍鷹BP65系列 (台灣製造)

食品系列

不織布



■ 21" 條子帽

■ 圓帽

■ 太空帽

布頭帽



■ 頭套帽

■ 布肩帽

■ 頭頂網布帽



■ 三層外科口罩

BFE ≥99% 細菌過濾效率

PFE ≥99% 微粒子過濾效率

通過合成血液擋力



■ 微笑口罩



■ 韓國款口罩

HG-35 UltiMate™ Heat Tolerant Browguard with face Shield



FS-18L
Up to 125°C



FS-18LG
Up to 125°C




FS-18GL
Up to 980°C




SV-15H
Heat Reflecting Mesh Steel

HG-25 UltiMate™ Headgear

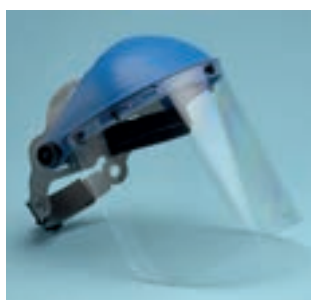

FS-15PC
Face Shield (Clear)

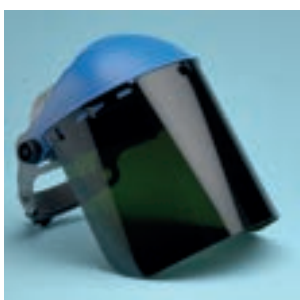

FS-15WS5
Welding Shield (WE 5)

ProGuard



CU-30L
Clear Lexan



CU-60R-V
Steel Mesh Visor + Muff

電工用面罩 ARC Flash Faceguard

(SG14C/HD-ARC-FR3 included in all CU-ARC kits)



FS20CPARC with VB 60



CU-ARC-1
includes Quattro™ Ear Plugs



CU-ARC-5
with Quattro™ Ear Plugs



CU-ARC-3
includes Quattro™ Ear Plugs



FS20

VB-60



CU-ARC-4
includes HM-20 Muffs



CU-ARC-2
includes HM-20 Muffs



SG-14C

HD-ARC-FR3
Balaclava

KB2020 即棄面罩 KB2020防護隔離面罩



用途：用於日常防護，對顆粒物與粉塵，沙礫、飛沫、異味細菌等隔離效果

即棄眼罩





B1BL 藍色頭罩



B1YE 黃色頭罩



AW7R 自動變光液晶電焊面罩
EN379/EN175/ANSI Z87.1/
CSA Z94.3 材質：PP



GW250 氣焊護目鏡
可掀框式 材質：PVC

面片



FC28AF永久性防霧
8" x12" x1.0mm
材質：PC



FC25透明
8" x12" x0.8mm
材質：PC



FC48N透明無邊
8" x15 1/2" x1.0mm
材質：PC



FC48G5抗紫外線
8" x15 1/2" x1.0mm
材質：PC
深綠色



A3 面罩帽弓
材質：ABS/鋁

HEARING PROTECTION 聽覺保護

EN352-1及EN352-2



舒適掛肩設計



HB-25 耳罩
NRR 25 (dB)



HB-35 耳罩
NRR 28 (dB)



EP-411 帶繩耳塞
NRR 27(dB)
100prs/ box



EP-412 帶繩連盒耳塞
NRR 27(dB)
50prs/ box

3M



1426 耳罩
NRR 21 (dB)



X4A 耳罩
NRR 27 (dB)



X5A 耳罩
NRR 31 (dB)



391-1100 桶裝耳塞
NRR 29 (dB)
500 prs/bottle



1100 即棄型耳塞
NRR 29 (dB)
200prs/ box



E-A-R 310-1001
Classic 即棄型耳塞
NRR 29(dB)
200prs/ box



391-0000 耳塞分配器



1110 帶線即棄型耳塞
NRR29 (dB)
100prs/box



E-A-R 311-1101 Classic
帶線即棄型耳塞
NRR 29(dB)
200prs/box



1270 帶線型耳塞
NRR25 (dB)
100prs/ box



E-A-R 340-4002
UltraFit 帶線連盒耳塞
NRR 25(dB)
50prs/box

透明防護眼鏡系列



OVR-SPEC 適合配帶眼鏡人士



戶外防護眼鏡系列



SG-14G-AF



SG-14M



SG-14 I/O



SG-14B



SG-14A



Terminator 9382-140



Terminator 9380-625



Victor 9754-625



Victor 9754-530



SG-24 I/O



SG-18G-AF



SG-24PL



SG-51G



GG-45G-AF

燒焊系列



9380-133 (WE 3)
Terminator



9080-135 (WE 5)
Visitor

老花系列 BIFOCA



RX-400



配件



polarized clip-on




cord




bag

3M 即棄口罩

 8210 N95 粉塵	 8210V N95 粉塵(呼吸閥)	 8212 N95 燒焊、煙燻 軟墊 (呼吸閥)	 8214 N95 燒焊、煙燻、臭氣 軟墊 (呼吸閥)	 Honeywell H801 N95/ KN95 粉塵	 Honeywell H910 Plus N95/ KN95 粉塵
 8246 R95 粉塵及微量酸性	 8247 R95 粉塵及有機氣體	 8576 P95 粉塵及微量酸性(呼吸閥)	 8577 P95 粉塵及有機氣體(呼吸閥)	 8810 P2 石棉塵及粉塵口罩	 9205 N95 粉塵

3M 6000 及 7000 系列過濾式呼吸器

 6000 系列半面式 (雙濾罐)	 6500 系列矽膠半面式(雙濾罐) 快速鎖定下拉設計	 7500 系列矽膠半面式 (雙濾罐)	 6000 系列全面式 (雙濾罐)	
 6001 防有機氣體濾罐	 6002 防酸性氣體濾罐	 6003 防有機、酸性氣體濾罐	 6004 防氨氣、甲胺濾罐	 6005 防甲醛、有機氣體濾罐
 6006 防多種氣體濾罐	 6009 防汞水銀蒸氣、 氯氣濾罐	 5N11 N95 濾棉 配合501濾棉蓋使用	 501 濾棉蓋	 502 濾棉蓋

 2097 P100 防粉塵、霧滴、核粉塵、 微量有機氣體及臭氣濾棉	 2091 P100 防粉塵、霧滴、煙煙、 氧氣微粒濾棉
 2071 P95 防粉塵、霧滴濾棉	 2078 P95 防粉塵、霧滴、微量酸性氣體 及有機氣體濾棉

自供式壓縮空氣呼吸器



◀ Scott Sigma-2
具有認可性的壓縮氣體系統
人體功學設計的背板及塑膠網背帶
採用阻燃及Kelvar®製肩帶
可配合200巴及300巴氣樽使用
符合標準 EN137 & EN139, AS1716

3M 3000 系列呼吸器

 3200(Medium) (中型)	 3700 盛棉器
 3311K-55	 3744 隔濾棉 隔濾有害粉塵小量有機氣體

適用於建築、石礦、打鑿、精實切割等。
加有防熱層濾棉，可同時隔濾有害粉塵、油煙煙毒
作業、裝修、汽車維修、農藥處理、殺蟲作業、
廢物處理、印刷及其他存在有機氣體的地方。
→ 微量：指濃度低於最高容許濃度 (PEL)
→ 以上產品均有 NIOSH 認可

注意及警告
勞工部認可
符合澳洲及紐西蘭
安全標準

MSA AirXpress One ▶
超寬視野全面罩
配300巴碳纖氣瓶
符合標準 EN136:1998/
EN137: 2006





參考款式 (歡迎訂造)



Weatherwear Series 風雨衣系列 (歡迎訂造 可印公司 logo)



3M 8910



3M 6160

- 463 PVC/Nylon 螢光黃 配 3M 8910 銀灰反光布料
- 563 PVC/Nylon 螢光橙 配 3M 6160 銀白反光膠帶
- 563 PVC/Nylon 螢光黃 配 3M 6160 銀白反光膠帶

尺碼: XS - 3XL




- D763 螢光黃
- C890 螢光橙
- D766 深藍

尺碼: M - 3XL
面料: 100% 滌綸PU复合防水
3M 視覺麗反光材料
EN 20471



NY05 雨袍

兩側帽有透明視窗



363 套裝配搭普通反光材料



NY06 套裝

臂章 / 肩帶 (歡迎訂造)



風雨衣套裝 (參考款式、歡迎查詢)




可拆式設計



雙前筒防風
防雨效果更佳



透明帽視野清晰



袖咀防雨水
倒流設計



高領設計

保暖套裝 (五種穿著變化)

- 風雨衣外套
- 使用YKK拉鏈
- Fleece 300gm / 370gm
- 繡字設計
- Fleece內裡(可選擇長袖/背心)



風雨衣三合一外套



可掛對講機



時尚開叉設計
便利提取工具
通風散熱透氣



鐳射標誌, 多角度顯示
比一般絲印耐用

風雨衣外套(參考款式, 歡迎查詢) 夾棉內裡





高警示功能防寒服

(歡迎訂做)

適合崗位穿著 / 戶外工作人員(歡迎訂做)

B008
4種穿著變化



螢光黃

螢光橙



材料：滌綸牛津複合防水面料
3M新雪麗保溫棉
3M視覺麗反光料

B406
3種穿著變化



材料：滌綸牛津複合PU防水面料，
3M新雪麗保溫棉
3M視覺麗反光料

高警示防護工作服

G472



螢光橙拼深灰色

螢光黃拼深灰色



材料：65%滌綸，35%棉斜紋面料
3M視覺麗反光料

休閒防寒服(3種穿著變化)

B300



(紅拼灰)

(藍拼灰)

材料：塔絲隆複合防水面料
3M新雪麗保溫棉
防水透濕
內膽可脫卸



內膽
可拆式內裡設計

警示反光背心



A555



A628



A862



A594



A751



A108前



A108後



Salzmann 10997



Salzmann 10907

戶外工作服 吸濕排汗、透氣快乾、夜間警示 <歡迎訂做>



E773 螢光黃



E773 螢光橙



E802 螢光黃



E802 螢光橙



E804 螢光黃

訂造款(歡迎查詢)



Protect Your People
(備有多種等級選擇)

電弧服



AR8-J-DH 夾克



AR8-P-DH 長褲



AR8-S-DH 襯衣

CAT 2-8.9 cal/cm2
採用6.5 oz DH面料含有
Nomex® 纖維縫紉縫制
DH面料由48%天絲, 40%阻燃
腈氣綸及12%芳綸纖維組成,
柔軟舒適

頭罩

上衣



高等級防電弧套裝

可提供多種面料材質和不同等級的防電弧套裝, 可應用在對電弧防護要求較高的多種工作場合

背帶褲



手套



腿套



便攜儲存包



不同電弧危險等級 (CAT) 防電弧值:

CAT1: 20cal/cm² (100% Nomex®), CAT2: 25cal/cm² (100% Nomex®), CAT3: 35cal/cm² (100% Nomex®), CAT4: 45cal/cm² (100% Nomex®), CAT5: 55cal/cm² (100% Nomex®)

圍裙系列



隔熱圍裙
Towa KM-2
物料: Kelvar
耐熱500 °C
長度: 80cm
產地: 日本

隔熱圍裙
Blue Eagle AL7
物料: 鋁箔
長度39"
寬度27"
標準: EN11612

防化圍裙
Ansell 56-100
物料: PVC(Vinyl)
長度: 49"
厚度: 18 mil

一般用途圍裙
Ansell 56-001
物料: Vinyl
長度: 44"
厚度: 8 mil



燒焊皮圍裙
Weldas 44-2136
物料: 黃色皮革
長度91cm
寬度61 cm
標準: EN340 EN470-1

即棄PE圍裙
顏色: 藍色
長度: 110cm
寬度: 84cm
包裝: 1000條/箱

U safe 防切割圍裙
物料: 304不鏽鋼
3mm直徑圓環
尺寸: 55cm * 70cm/
60cm * 80cm

防化衣系列

Dupont™



Tychem® C, F, C2和F2
可提供3, 4, 5, 6級防護
Tyvek®可提供5, 6級防護



Lakeland
MicroMax NS

Tyvek® 400

Tychem® 2000



Tychem® 6000

Tychem® 9000

Tychem® 10000
TK554TLY Level A

一般防護系列




PP/PE Isolation Gown
即棄隔離袍

Anti-static Gown
防靜電袍

PP Lab Coat
實驗室袍

Cotton Lab Coat
棉質醫生袍

Jump suit
連身工作服

Chemical 	Ultratril 492   Nitrile • Good mechanical resistance and long-lasting • Use in: Mechanical/ Construction/ Chemical/ Paints Industry/ Pesticides and Cleaning • Length: 32cm, Thickness: 0.38mm • Size 6-11 	Alto 415   Neoprene and Natural Latex • Fine touch for light chemical protection • Tactile sensitivity, Good grip • Used in: Spray-painting/ Industrial Cleaning/ Maintenance & Aeronautics Industry • Length: 32cm, Thickness: 0.6mm • Size: 6-11 
	Butoflex 651   Butyl Material • Ultimate for very corrosive Acids, Ketones, Esters & Amine derivatives • Used in: Laboratories/ Mechanical/ Chemical Industry/ Formulating paints/ Varnishes/ resins and inks • Length: 37cm, Thickness: 0.5mm • Size: 7-10 	AdvanTech 514   Natural Latex, Neoprene and Nitrile • Excellent resistance and strong Chemical • Manufacturing process guarantees a very low level of contaminants • Used in: Controlled Environment • Length: 38cm, Thickness: 0.5mm • Size: 6-11 
Food 	Krotech Food 838   Seamless textile+HDPE Fibres • Excellent for cut resistance • Reinforced forearm protection, Washable • Guarantee up to 20 cleaning cycles (90°C) • Use in: Food Industry, Contact with all type of food • Length: 34cm • Size: 7-10 	Vital 177   Natural Latex • Chlorinated, Embossed texture for grip • Excellent dexterity and flexibility adapted to contact with food • Guaranteed without silicone • Used in: Food Industry, Cleaning and handle of household detergents • Length: 31cm, Thickness: 0.4mm • Size: 6-10 
Thermal 	TEMP-TEC 332   Polychloroprene, Knitted thermal interior • Excellent thermal insulation, Maximum temperature 175°C • Multi-purpose chemical resistance • Compliance with FDA regulation for foodstuff contact • Use in: Mechanical/ Petrochemical/ Rubber Industry/ Steam cleaning/ Road works in cold conditions • Length: 36cm • Size: 8-10 	Tempcook 476   Nitrile, knitted thermal interior • Thermal protection up to 250°C • Resistance to oils, greases and detergent product • Silicone free and washable • Use in: Food/ Catering Industry/ Bakeries • Length: 45cm • Size: 7,9,10 
Handling & Cut 	Ultrane 553   Seamless textile support/ Nitrile • Excellent abrasion and to dirt particles • Excellent tactile sensitivity • Use in: Automotive/ Mechanical/ Metalworker/ Construction Industry • Length: 22-26cm • Size: 6-10 	Krytech 837   13g Seamless textile+HDPE fibres • Foam Nitrile/ Knitted cuff/ Touchscreen • Leather layer on palm with reinforced thumb, good puncture • Superior cut resistance LEVEL E • Durability, Washable, Dry cleaning up to 5 times • Use in: Automotive/ Cutting strip/ Metal working • Length: 30cm • Size: 8-11 
	Krytech Arm 532/538    13g Seamless textile +HDPE fibres • Cut protective Sleeve with thumb Loop • Dexterity, a Velcro adjustable strap for secure fit • Thin thumb hole area provides better comfort • Washable until 5 cleaning cycles • Silicone free, Standard 100 by OEKO-TEX • Use in: Automotive/ Mechanical/ Metal working/ Construction  Length 538 (60cm) Length 532 (45cm)	




AirexDry 透氣舒適



- MicroFinish Design
- Grip in Dry & Wet, Breathability
- SMART liners absorb and evaporate moisture
- Fresh & clean Sanitized
- 13G Nylon / Nitrile coating
- EN388:2016 CE 3121X, OEKO-TEX® STANDARD 100
- Size: 7-11



ActiveGrip XA-324 超級防滑



- MicroFinish Design
- Grip in Dry & Wet
- Fresh & clean Sanitized
- 13G Nylon / Latex coating
- Finger coated style
- Extra coating of thumb area
- Water resistant and less penetration
- EN388:2016 CE 2131X, OEKO-TEX STANDARD 100
- Size: 6-11



PowerGrab Premium 340 特級防滑



- MicroFinish Design
- Excellent Grip in Dry & Wet
- Extremely Durable & Heavy Work
- 10G cotton liner / Latex Palm coat
- Extra coating of thumb area
- EN388:2016 CE 3142X
- Size: 6-11



SG A141 貼手靈敏防滑



- MicroFinish Design
- Excellent Grip in Dry conditions
- 13G seamless Polyester / Nitrile coating
- Maximum comfort and Minimum hand fatigue
- EN388:2016 CE 3121X
- Size: 7-11



Blue Liner 300 耐用型



- Excellent Grip
- 10G Cotton liner / Palm Latex coated
- Extra coating of thumb area
- EN388:2016 CE 2141X
- Size: 7-11



859 Fingertips 輕巧型



- Reinforced 3 fingertips (thumb, index and middle finger)
- Flexible, Breathable and comfortable
- Excellent dexterity, low lint
- Nylon liner / Polyurethane coating
- Size: S-XL



3M Comfort Glove 舒適型




- Nylon with Nitrile palm coating
- Comfort and breathable, Washable
- Foamed nitrile provides excellent grip, even in wet or oily conditions
- EN388 CE 3122A
- Size: S-L
- Made in Korea




3M Comfort Glove CUT



- Nylon with Nitrile /UHMWPE composit liner palm coating
- Long-lasting, durable and washable
- Excellent for Handling abrasive or sharp parts
- EN388 4444D
- Size: S-XL
- Made in Korea



Korel PU comfort 舒適型



- 13g Polyester PU coated
- Excellent grip
- Dexterity and Flexibility
- Resistance to oil and mild chemical
- Touch screen
- EN388 CE 4131X
- Size: 7-10



HXT N6802 舒適型



- 15g nylon / spandex shell nitrile foam palm coated
- Comfort / Breathable / Flexible
- Good grip and touching
- EN388:2016 CE 4131X
- Size: 7-11



Handling & Cut

PowerGrab Katana 310



- Excellent grip and stable cut resistance
- Crinkle finish extra coating of thumb area
- 10G seamless Kevlar + steel fiber / Latex Palm double coating
- EN388:2016 CE 3X43F / EN407 (2)
- Size: 7-11

ActiveGrip Omega 540



- MicroFinish Design
- Double coated palm, keep hands clean
- Lightweight / Liquidproof palm
- Best Grip in Dry, Wet & Oil conditions and Cut risks
- 13G seamless HPPE /Glass Fiber/Nitrile double coating
- EN388:2016 CE 4X42C / "Sanitized Actifresh" Logo
- Size: 7-11

ActiveGrip Omega Plus 541




- MicroFinish Design
- Finger coating prevents penetration of liquids
- Oil resistance and dexterity and durability
- Best Grip in Dry, Wet & Oil conditions and Cut risks
- 13G seamless HPPE / Glass Fiber/Nitrile double coating
- EN388:2016 CE 4X42C / "Sanitized Actifresh" Logo
- Size: 7-11

ActiveGrip Omega Max 542




- MicroFinish Design
- Double coated palm and back, keep hands clean
- Prevents any liquids from outside
- Best Grip in Dry, Wet & Oil conditions and Cut risks
- 13G seamless HPPE /Glass Fiber/Nitrile double coating
- EN388:2016 CE 4X42C / "Sanitized Actifresh" Logo
- Size: 7-11

PowerGrab KEV Thermo 345




- Extra warmth and cut resistance
- 10G napped Acrylic / Kevlar liner
- Double coated Latex palm under dry and wet conditions
- EN388:2016 CE 1X42C / EN511:2006-02X
- Size: 7-11

Exxoguard EG3-351




- Hi-Viz Impact Protection
- 10G seamless Kevlar + steel fiber/latex palm coating / TPR
- Highest possible cut resistant level (F) of EN388:2016 and unsurpassed grip
- TPR protection pads attached with Kevlar thread
- EN388:2003 CE 3543 / EN407:2006 -X2XXXX
- Size: 8-11

OR656 KEV



- Protection against oils and cut hazard
- Combination of seamless cotton / 13G Kevlar / Durable PVC coating
- Handling wet / slippery material
- 30cm length
- EN388: 2016 CE 4342X
- Size: 8-10

K-100



- 7G Knitted Kevlar
- Excellent cut resistance
- High temperature with heat resistance
- No melting or hear shrinkage
- Light and Flexible
- Suit for steel, Machinery / Shipbuilding Industry / Plastic Processing
- Size: M-L
- Made in Japan

ENKERR MS851043



- 13g knitted seamless HPPE liner / nitrile palm coating
- EN 388:2016 CE 4X42D
- Size: 7-11



U-SAFE 1221



- 304L stainless steel
- Flexible strap adapts to all wrist to ensure comfort
- Adjustable metal fastener design
- Standard: EN 1082-1, FDA Approval
- Size: XXS-L
- Origin: China

ActiveGrip 581



- MicroFinish Design
- Grip in Dry & Wet and Oil conditions
- Double coated against oil penetration
- 13G Nylon/Nitrite coating
- EN388:2016 CE 4121X, OEKO-TEX® Standard 100, Sanitized*
- Size: 6-11




ActiveGrip 566



- MicroFinish Design
- Grip in Dry & Wet and Oil conditions
- Durable NBR coated against oil penetration
- 13G Poly/cotton/Nitrite coating
- EN388:2016 CE 4121X, Sanitized*
- Size: 7-11, 30cm(12") length, Sanitized*



OR656



- Dipped rough finish handle wet and slippery surface
- An anti-oil compounded vinyl film against a slippery surface
- Durable PVC / 13G cotton liner
- Antibacterial treatment is applied on the liner
- 30cm (12") Length
- EN388:2016 CE 3121X
- Size: 7-11



Chemical

SOLVEX



275 165 185
15" L 15" L 18" L
17 mil 22 mil 22 mil



165



185



- Handling variety of chemical hazards
- Offer a far superior snag, puncture and abrasion protection
- High levels of flexibility, comfort and dexterity
- Complies with FDA food handling requirements
- Cotton flocking, reducing sweat
- EN388, EN374, EN420
- Size 8-10


ANSSELL 19-026



- Neoprene Shell / Thermal Liner
- Handling of objects in Hot or Cold Chemical
- Excellent protection against greases and oils
- Superior flexibility and grip
- Protects from intermittent contact with hot surfaces up to 180°C
- 26" length
- EN388 3122B / EN374-1:2016 type A : AKLMPT/EN407 32XX4X / EN511 (121)
- Size: 8,10

Arm

OR657



- Dipped rough finish handle wet and slippery surface
- An anti-oil compounded vinyl film against a slippery surface
- Durable PVC / 13G cotton liner
- Antibacterial treatment is applied on the liner
- The PVC sleeve is heat-sealed, is reinforced to prevent tearing and puncture
- An elastic rubber collar holds the sleeve in place
- 60cm (24") Length
- EN388:2016 CE 3121X
- Size: 7-11

721 (Green)



- Light and easy to put on and take off
- Arm cover are welded, water does not enter
- Suitable for working involving dirty water
- PVC material
- Hard to tear a durable
- 65cm (25.5") Length
- Size M/L
- Made in Japan

031 White Sleeve




- Urethane arm cover made of polyurethane
- Excellent oil resistance
- The cuffs have a rubber band to prevent them from falling off
- Conforms to Japanese food sanitation
- Suitable for food processing, fishery and agricultural work
- 38cm (15") Length
- Made in Japan



KN-1



- Kevlar Material
- Cut / Heat resistance
- 36cm Length with rubber band cuffs
- Free Size
- Made in Japan



757 Navy Sleeve



- PVC/ Nylon
- Length: 18"
- Free Size



Thermo

42-474 Hot Mill Glove

PowerGrab Thermo 335



- NBR coating /Non-woven felt insulation
- Excellent grip for dry or oily surfaces
- Contains no asbestos
- Compliant to FDA food handling requirements
- Handling of dry object up to 250°C
- 13.5"-14" length
- EN388: CE 2241 / EN407: -X2XXXX
- Size: 9-10



- MicroFinish Design
- Long lasted gloves for cold weather
- 10G Napped Acrylic liner/ Latex palm
- Minimize allergic reaction
- Wet and Dry handling
- EN388:2016 CE 1141X / EN511:2006-01X / EN 407-X2XXXX
- Size: 7-11

PowerGrab Thermo 347

PowerGrab Thermodex Max 329




- PowerGrab Thermo 347
- MicroFinish Design
- 3/4 covered coating to provide extra warmth
- Covered all fingers keeping hand away from dirt and water penetration
- 10G Napped Acrylic liner/ Latex palm
- Minimize allergic reaction
- Wet and Dry handling
- EN388:2016 CE 1121X / EN511:2006-01X
- Size: 7-11




- MicroFinish Design/ "Sanitized Actifresh" Logo
- Liner is engineered to repel water/ breathable
- Fully coated back for extra protection and warmth
- 13G Napped Nylon/ Polyester/Latex palm
- Wet and Dry handling
- EN388:2016 CE 1131X / EN511:2006-XIX
- Size: 7-11

Dailove 102

KA-13



- PU coating with warm liner
- Usable Temperature 100 to -20°C
- Dealing with dryice / Freezer/refrigerator/ Handle Food/Ice sculpture
- Hot water and steam work
- EN388 CE 4X2X / EN511:CE 121
- EN 407-X2XXXX
- Size: L



- Kevlar material
- Heat resistance up to 200°C
- Free size
- Length: 28cm / 38cm
- Made in Japan

INXS 6003

INXS 6005 NITROGEN



- High Temperature 350°C
- Reflective Heat up to 1000°C
- Coating Material: Aluminum foil
- Lining Material: Felt
- EN388 -2003/ EN407-2004/EN420-2003+A1-2009/EN659-2003+A1-2008/AC-2009
- Free Size , 38 cm Length



- Breathable Waterproof composite material /Cotton
- Temperature Range +100°C to -250°C
- Free Size, 38 cm Length
- STANDARD :EN 511-2006/ EN388-2003/EN420-2003+A1-2009
- Frozen Food Industry-Liquefied Petroleum Gas-Scientific Experiment

Food

445 Cut resistance



- 10g IZANAS material fiber
- Suitable for Food / Pharmaceutical Industry
- Washable and Good Touch
- EN388:2016 CE3X43C / EN420:2003 +A1:2009
- Meet Japanese Food sanitation
- Size M-XL
- Made in Japan



145 Cut resistance



- 13g IZANAS material fiber
- Suitable for Food / Pharmaceutical Industry
- Washable and Good Touch
- EN388:2016 CE3242B
- Meet Japanese Food sanitation
- Size S-XL
- Made in Japan



Tronex 9010 Nitrile (Blue)



- Food & Exam Chemo-rated
- 100% Latex/Power Free, Fully Textured, Non-sterile
- Thickness: 0.11mm
- Length: 240mm (9.5")
- FDA 510(K)/ ASTM D6319/ F1671/ D6978
- Size: S-L

Tronex 3010 Latex (White)



- Food & Exam Grade
- Power Free, Fingertip textured, Non-sterile
- Thickness: 0.11mm
- Length: 240mm (9.5")
- FDA 510(K)/ ASTM D3578/ F1671
- Size: S-L

Tronex 9934 Nitrile (Blue)



- Food Grade
- Power Free, Fingertip textured, High elongation
- Thickness: 0.08mm
- Length: 240mm (9.5")
- FDA CFR Title 21 part 177 for safe contact food surfaces
- Size: S-L

Tronex 8980 Vinyl (Natural)



- Food Grade
- Power Free, Smooth finish, 100% latex free
- Thickness: 0.09mm
- Length : 240mm (9.5")
- FDA CFR Title 21 part 177 for safe contact food surfaces
- Size: S-L

Professional

Exxoguard EG5-231




- MicroFinish design
- Hi-Viz Impact Protection
- 10G seamless poly/cotton liner /Nitrile palm coating
- TPR dorsal protection on the knuckle & fingers for impact
- Double Layer coating offers oil resistance and oil penetration.
- Outperforms in dry, wet or oily conditions
- EN388:2003 CE3122
- Size: 8-11



486 Pig Leather




- Good quality Pig leather crest with magic tape
- Easy and comfortable with removable wrist tape
- Soft and Good Touch
- Use in Civil /Construction/ steel/shipbuilding Industry
- Size : M (22cm)/L (23cm)/ LL (24cm)



HF100



- 13g Nylon and PU Palm coated
- Suitable for Food / Pharmaceutical/Laundry/ Electronic Precision Industry
- Washable and Good Touch
- Meet Japanese Food sanitation
- Size: S-XL
- Made in Japan



HexArmor Sharpmaster II:9014



- Highest needlestick resistance,
- SuperFabric® brand material
- Tested using actual 25 gauge needles against ANSI/ISEA 105 standard
- EN388:2016 CE 4X44F, ANSI/ISEA Cut Level A9 and Needlestick Level 5
- Size: 9

Biname ELS 05 電工



- Range 00-3
- Working Voltage: 500V - 26,500V
- Cuff Length: 360mm
- STANDARD: IEC 60903 - EN 60903, EN420
- Made in Belgium
- Size: 8-10

Bodyguard GL194



- Impact Protection
- 13g HPPE material palm coated Nitrile Sandy
- Thumb crotch, TPR is sewed on hand back
- Touch screen
- EN388:2016 CE 4X42EP, EN 420:2003+A1:2009
- Size: 8-10



Harness 全身式安全帶

EN361 :2002



PN11 (後面扣)
900gms



PN21 (後面扣)
1100gms



PN12 (前後扣)
800gms



PN23(前後扣)
1300gms



PN24 (前後扣)
1210gms



PN32 (多功能式)
1650gms

How to Wear a Harness

The Harness can be worn following these simple steps:-



PN01 Positioning Belt

Steps for Work Positioning



Steps to USE the KARAM Suspension Intolerance Strap



Suspension Intolerance Strap
STS01 懸掛舒緩帶



TL-01 工具手帶
可承重10kg
長度:85~135cm




Lanyard 連繫帶

另可選訂1.0/1.5m



EN 354:2010

EN 355:2002

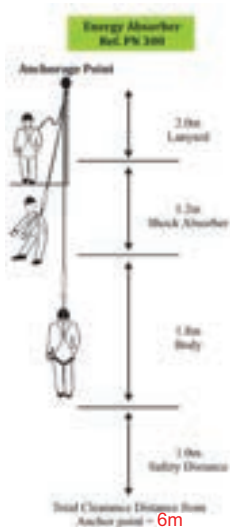

PN2002
(2.5m)
EN360




PN-309N (2m) 連緩衝器




PN-305N (2m) 連緩衝器




PN-351N (1.5/2m)




Parapet Anchor (EN795:2012 Type B)

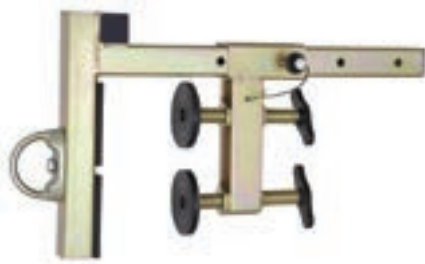

SA11

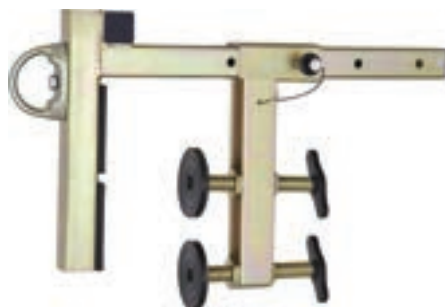

SA11B (適用於有窗框的牆身)

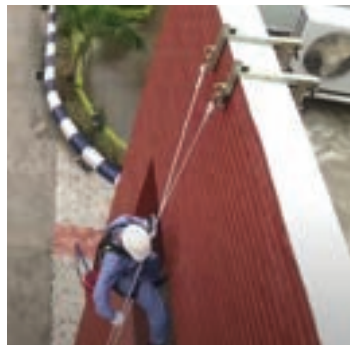

SA08 Flange width from 90 to 340mm
Min. Breaking Strength: 23kN
EN795:2012 Type B



SA08 (Mini) Flange width from 75 to 150mm
Min. Breaking Strength: 23kN
EN795:2012 Type B



PN805
1.07m Polyester Webbing
Min. Breaking Strength: 18kN
EN795:2012 Type B



PN804
2m Polyester Webbing
D-Ring on both ends.
Min. Breaking Strength: 18kN
EN795:2012 Type B

Anchor Beam 臨時防墜繫穩裝置



PN802
Installed on door frame of width from 60 to 125cm
Only used by one person at the same time
Provided with bag: BG34
EN 795: 2012 Type B



BG34



PN3000
a length ranging from 5m to 20m.
Only used by one person at the same time
EN 795:1996, Class B






SA12
M12 x 110mm
EN 795:2012 Type A.




上落防墜扣 <適用於14 ~ 16mm dia 獨立救生繩>

(EN353-2:2002)

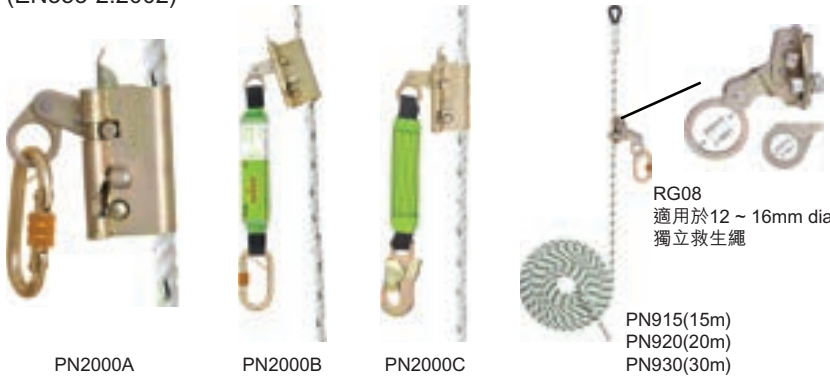

有提供拉力測試證書
及織扣服務

垂直/橫向防墜裝置 (EN360:2002, VG11 RFU 11.060)



Sharp Edge Tested Retractable Block
PCGS 3.5(SE)---3.5m
PCGS 05(SE) --- 5m
PCGS 7.5(SE)---7.5m
PCGS 10(SE) ---10m



垂直/防墜裝置

(EN360:2002)



Hook 安全扣

(EN362:2004)



Safety Nets 救生安全網



(可訂造不同尺碼)

Tripod 三腳架

EN795:2012 Type B



Retrieval Fall Arrester Block
拯救式防墜裝置
PCGS 20R ---20m
PCGS 25R ---25m
PCGS 30R ---30m
(EN360:2002, EN1496 :2017 Class B)




Horizontal Anchorage Line 水平防墜裝置

EN795:2012 Type C

PN 4000



Floor / Ceiling Mounted 適用於牆身或天花



Roof Mounted 適用於建築物頂上蓋



Applications: Over the Roof / Parapet area




Vertical Anchorage Line 垂直防墜裝置

EN795:2012 Type A

EN353-1:2014



PN 7000



PN 7000
Extension post



PN 8000



PN 8000(01) Vertical Trolley



PN 9000



PUROFORT

CA61131



Segment: Food
Description: Dunlop Purofort Foodpro Multigrip Safety(steel toe cap)
Material: PUROFORT®
Size Range: 35/36-49/50
Standard: EN ISO 20345:2011 S4 CI SRC
Weight: 1.6kg/pr - 370mm(H)

C762933



Segment: Agriculture
Description: Dunlop Purofort+ full safety (steel toe cap/steel midsole)
Material: PUROFORT®
Color: Dark Green/Black
Size Range: 36-49/50
Standard: EN ISO 20345:2011 S5 CI CR SRC
Weight: 2.37kg/pr - 350mm(H)

LJ2HD01



Segment: Industry
Description: Dunlop Purofort FieldPRO full safety (steel toe cap/steel midsole)
Material: PUROFORT® FieldPro
Size Range: 37-47
Standard: EN ISO 20345:2011 S5 CI CR SRC
Weight: 1.8kg/pr - 380mm(H)

ACIFORT

CF11441



Segment: Food (Lightweight)
Description: Dunlop PU Baseline Safety (steel toe cap)
Material: High Pressure PU
Standard: EN ISO 20345:2011 S4 CI SRC
Size Range: 35-49/50
Weight: 1.34kg/pr - 370mm(H)

A781331



Segment: Food
Description: Dunlop Acifort Tricolour safety (steel toe cap)
Material: ACIROFORT® (PVC, Nitrile rubber and polymers)
Size Range: 36-47
Standard: EN ISO 20345:2011 S4 SRA
Weight: 2.16kg/pr - 380mm(H)

B780331



Segment: Food
Description: Dunlop Acifort Tricolour (Non toe cap)
Material: ACIROFORT® (PVC, Nitrile rubber and polymers)
Size Range: 36-47
Standard: EN ISO 20347:2012 O4 FO SRA
Weight: 2.07kg/pr - 380mm(H)

PVC

142VP.PT



Segment: Industry
Description: Dunlop Protomaster Chest Wader full safety (steel toe cap/steel midsole)
Size Range: 39-47
Standard: EN ISO 20345:2011 S5 SRA

142VP



Segment: Agriculture
Description: Dunlop Protomaster full safety(steel toe cap/steel midsole)
Size Range: 36-48
Standard: EN ISO 20345:2011 S5 SRA
Weight: 2.4kg/pr - 380mm(H)

380VP



Segment: Agriculture
Description: Dunlop Pricemaster (Non toe cap)
Size Range: 35-48
Standard: CE
Weight: 2.1kg/pr - 390mm(H)

H142211



Segment: Industry
Description: Dunlop Devon full safety (steel toe cap/steel midsole)
Size Range: 36-47
Standard: EN ISO 20345:2011 S5 SRA
Weight: 2.1kg/pr - 330mm(H)



GS-8002



Application: Agriculture/Cleaning/ Fishery/Food Processing/Gardening
Description: Goodluck PVC boot (non toe cap)
Material: PVC + Nitrile
Size Range: 35-47
Weight: 1.2kg/pr - 270mm(H)
****Optional in Height:** 330 / 360mm

GS-8267



Application: Agriculture/Cleaning/ Fishery/Food Processing/Gardening
Description: Goodluck PVC boot (non toe cap)
Material: PVC + Nitrile
Size Range: 35-47
Weight: 1.2kg/pr - 270mm(H)
****Optional in Height:** 330 / 360mm

GS-8268



Application: Construction/Concrete/ Chemical processing/Fuel Depot/ Sewage treatment
Description: Goodluck fully safety (steel toe cap/steel midsole)
Materials: PVC + Nitrile
Size Range: 37-47
Standard: EN ISO 20345:2011 S5 SRA
Weight: 2.15kg/pr - 390mm(H)

GS-8823



Application: Construction/Concrete/ Chemical processing/Fuel Depot/ Sewage treatment
Description: Goodluck fully safety (steel toe cap/steel midsole)
Materials: PVC + Nitrile
Size Range: 36-47
Standard: EN ISO 20345:2011 S5 SRC
Weight: 2.15kg/pr - 390mm(H)



1層 ミッドソール
足への衝撃を吸収する
「SX高機能樹脂」
Mid-Sole of polyurethane for
excellent energy absorption.



2層 アウトソール
独立懸架方式で床面をグリップする
「SXラバー」
Independent movable cleats
of SX rubber provide amazing
sitting grip.



3層 フレームソール
アウトソールを支え、安定性を保つ
「SXラバー」
SX rubber frame-sole supports
out-sole to keep stability.

FRICTION 耐滑性



FLAT SOLE



FIT 装着感



FLEXIBILITY 柔軟な鞋底



FINENESS 高品質



優れたワッシャー性で衝撃を軽減
摩耗物を減らした部分のみを交換する
サスペンションシステムへの衝撃をパ
ラメータ分散します。
SX Triple Layer F sole
disperases impact on the legs.



高熱耐熱性
靴底からの伝熱に耐えて足を
保護する「高熱耐熱性」を
有します。
Heat resistant material provides heat
transfer resistance from outside.



耐油・耐薬品性
油・薬品（酸・アルカリ性）
への耐久性を有しています。
作業中も安心して作業を
行なうことができます。
Fuel oil and chemicals resistant.
With acid and alkali-resistant property
that it doesn't lose resistance property
despite of kinds of chemicals.



ミッドソール
ミッドソールには、加水分解しないエラストマー
樹脂を使用。また、高熱耐熱性を
備えたエラストマーを採用しています。
Midsole has a function of the resistant hydrolysis PU. Outsole
has a function of the excellent abrasion resistant rubber



ファイバーストロン
ファイバーストロンを履き
「Extremely lighter Non-metal」Toe cap which
made by mixture of composite.



プロテクトライン
甲根と親指の接合部からの荷
重浸透の侵入を防ぎ、履物に
よつた場合に浸透を利上げま
す。
Protect Line provides a protection against
penetration of liquid from outside.



8511



8611



SL11-BL

SPEC

	Glazed box Cow Leather	Full Grain Cow Leather	Soft Embossing Full Grain Cow Leather
	840g	820g	840g
	23.5~28, 29, 30	23.5~28	23.5~28



SL22-BL



WS11



WS22

SPEC

	Soft Embossing Full Grain Cow Leather	Soft Embossing Cow Leather	
	945g	800g	890g
	23.5~28	22~28, 29, 30	23.5~28



SS18BV



SS11



SS22



SS33

SPEC

	Cow Leather (Velour)	Soft Embossing Cow Leather	
	900g	840g	1065g
		23.5~28, 29, 30	

定番安全靴の極み 2層底 Ultimate Standard Safety Shoes with Dual Density Polyurethane Sole



7511
White



7511
Black



7522



8818N
Navy

SPEC

	Soft Embossing Cow Leather			Synthetic Leather
				
	800g	800g	890g	810g
	23.5~28	23.5~28, 29, 30	23.5~28	22~28, 29, 30



8911



AW11BV



AW11



AW22

SPEC

	Synthetic Leather	Cow Leather Velour	Cow Embossing Cow Leather	
				
	720g	780g	770g	860g
	22~28, 29, 30	22~28	22~28	23.5~28

FD series

ハードな現場に 1層橡膠底
Heavy-duty and tough spots



鋼製先芯
Wide Steel Toecap



FD11



FD22



6061

SPEC

	Cow Leather		
			
	1095g	1180g	750g
	23~28, 29, 30	23.5~28, 29, 30	22~25



履いた人から履きつづける
SX3層底F
HYBRID SOLE



SPEC

	Cow Leather Nubuck Velour
	1030g
	EUR 36-46



JS211 Black


S100

Upper	Grain Buffalo
Toecap	Steel
Midsole	Steel
Category	S3 SRC
Standard	EN 20345
Size Range	EU 35-47


S200(S1) / S200(S3)

Upper	Barton Buffalo
Toecap	Steel
Midsole	With or Without Steel
Category	S1 SRC / S3 SRC
Standard	EN 20345
Size Range	EU 35-47


S900(S1) / S900(S1P)

Upper	Barton Grain Buffalo
Toecap	Steel
Midsole	With or Without Steel
Category	S1 SRC / S1P SRC
Standard	EN 20345
Size Range	EU 35-47


S600(N) / S600(S1)

Upper	Barton Grain Buffalo
Toecap	With or Without Steel
Midsole	None
Category	NS SRC / S1 SRC
Standard	EN 20347 / EN 20345
Size Range	EU 35-47


S801

Upper	Barton Grain Buffalo
Toecap	Steel
Midsole	Steel
Category	S3 SRC
Standard	EN 20345
Size Range	EU 35-47


S8007

Upper	Grain Buffalo
Toecap	Steel
Midsole	Steel
Category	S1P SRC
Standard	EN 20345
Size Range	EU 40-47


S8001

Upper	Embossed Grain Buffalo
Toecap	Steel
Midsole	Steel
Category	S3 SRC
Standard	EN 20345
Size Range	EU 40-47


K701

Upper	Tango Grain Buffalo
Toecap	Steel
Midsole	Steel
Category	S3 SRC
Standard	EN 20345
Size Range	EU 36-47

Category	Features	Category	Features
NS	Non-safety, does not comply with EN ISO 20345	S3	As per S2, with penetration resistant midsole
SB	Safety toecap protecting against 200J impact	S4	As per S1, with waterproof seal
SBP	As per SB, with penetration resistant midsole	S5	As per S4, with penetration resistant midsole
S1	As per SB, with Anti-static properties, Fuel oil resistant, energy absorbing heel	SRA	Slip resistance on ceramic tile floor with dilute soap solution
S1P	As per S1, with penetration resistant midsole	SRB	Slip resistance on steel floor with glycerol
S2	As per S1, with water resistant upper	SRC	Slip resistance on ceramic tile floor with dilute soap solution and on steel floor with glycerol


VISITOR

Safety cap overshoe	
Upper	Embossed Grain Leather
Toecap	Steel
Standard	EN 12568
Size Range	Free


LATEX INSOLE

Antistatic
Increase comfort
Eliminates shock impact
Reduction in fatigue, aches and pains
Size range: EU 35-46


PU INSOLE

Antistatic
Lightness and breathable
Long-lasting
High energy absorption
Give good support to inside of the foot
Size range: EU 36-47



AK901(S3)

- Black grain barton buffalo
- Composite toe cap
- Kevlar midsole
- EN ISO 20345: 2011 SRC
- Size range: 35-47

S5008(S1P)

- Black synthetic leather
- Composite toe cap
- Kevlar midsole
- EN ISO 20345: 2011 SRC
- Size range: 35-47



S3003N

- Black synthetic leather
- Non toe cap
- Non midsole
- EN ISO 20347: O1 SRC
- Size range: 35-47



AK801(S3)

- Black grain barton buffalo
- Composite toe cap
- Kevlar midsole
- EN ISO 20345: 2011 SRC
- Size range: 35-47

* 另有K828EA(SB)電絕緣靴

* 符合GB12011-2009標準(適合電工作業)



S4002(S1)

- White synthetic leather
- Steel toe cap
- Non midsole
- EN ISO 20345:2011 SRC
- Size range: 35-47



K802(S3)

- Brown flat nubuck
- Composite toe cap
- Kevlar midsole
- EN ISO 20345: 2011 SRC
- Size range: 36-46



K702(S3)

- Brown crazy horse leather
- Steel toe cap
- Steel midsole
- EN ISO 20345: 2011 SRC
- Size range: 36-47



K805(S3)

- Brown flat nubuck
- Steel toe cap
- Steel midsole
- EN ISO 20345: 2011 SRC
- Size range: 36-47



K815(S3)

- Black flat nubuck + KPU
- Composite toe cap
- Kevlar midsole
- EN ISO 20345:2011 SRC
- Size range: 36-47

S5002(S1P)

- Black grain smooth buffalo
- Composite toe cap
- Kevlar midsole
- EN ISO 20345: 2011 SRC
- Size range: 36-47



S5001 (DEIMOS) S1/S1P

- Black barton split buffalo
- Steel toe cap
- Steel midsole
- EN ISO 20345:2011 SRC
- Size range: 36-49



S5002 (TITAN) SB/SBP

- Black barton split buffalo
- Steel toe cap
- Steel midsole
- EN ISO 20345: 2011 SRC
- Size range: 36-49

BORA

- Split barton print upper
- Cambrella lining
- EVA insole
- Steel toecap 200 Joules
- Steel midsole
- EN ISO 20345:2011 S1P SRC
- Size range: 36-46



SIROCCO

- Split barton print upper
- Cambrella lining
- EVA insole
- Steel toecap 200 Joules
- Steel midsole
- EN ISO 20345:2011 S1P SRC
- Size range: 36-47



PERFORMANCE

- Pull up leather upper
- Mesh lining
- EVA rubber insole
- Composite toecap 200 Joules
- Kevlar anti-penetration 1100N
- EN ISO 20345:2011 S1P SRA
- Size range: 36-46



LUKE (WEINBRENNER by Bata)

- KPU upper
- Mesh lining
- Rubber/EVA outsole
- Composite toecap 200 Joules
- Kevlar anti-penetration 1100N
- EN ISO 20345:2011 S1P SRC
- Size range: 35-46



SAFETY JOGGER
WORKS

ENGINEERED IN EUROPE

Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

TWIST LOCK SYSTEM AVAILABLE



FLOW S3 MID

- Synthetic Nubuck Upper
- PU/PU Outsole
- Composite Toecap
- Anti-puncture Textile Midsole
- Weight: 0.615 kg
- EN ISO 20345:2011 - S3 ESD SRC
- Size range: EU 35-48




FLOW S3 LOW

- Synthetic Nubuck Upper
- PU/PU Outsole
- Composite Toecap
- Anti-puncture Textile Midsole
- Weight: 0.600 kg
- EN ISO 20345:2011 - S3 ESD SRC
- Size range: EU 35-48



RAPTOR S1P WITH ACTIVE AIR UNIT

- Mesh, Nubuck Leather Upper
- Phylon/Rubber Outsole
- Composite Toecap
- Anti-puncture Textile Midsole
- Weight: 0.653 kg
- EN ISO 20345:2011 - S1P SRC
- Size range: EU 36-47



RUSH S3 WITH SIDE ZIP

- Pull-up Leather Upper
- PU/PU Outsole
- Steel Toecap
- Steel Midsole
- Weight: 0.702 kg
- EN ISO 20345:2011 - S3 SRC
- Size range: 36-47



SPEEDY S3

- Nubuck Action Leather Upper
- PU/Rubber Outsole
- Composite Toecap
- Anti-puncture Textile Midsole
- Weight: 0.66 kg
- EN ISO 20345:2011 - S3 SRC HRO
- Size range: EU 36-47



ULTIMA S3

- Pull-up Leather Upper
- PU, Rubber Outsole
- Composite Toecap
- Anti-puncture Textile Midsole
- Weight: 0.870 kg
- EN ISO 20345:2011 - S3 ESD SRC HRO
- Size range: EU 37-48





T-1231 Eagle S3 SRC HRO

- Genuine Black Leather Upper
- Gravity TRX-II / Rubber outsole
- Non-metallic toe cap / midsole
- BOA® Fit System
- Size range: 36-48



T-1297 I.S. (Hawk)

- SBP E HRO FO WR SRC
- HDry® Waterproof Technology
- Non-metallic toe cap / midsole
- BOA® Fit System
- Size range: 36-48



T-955 Cobra

- SBP E WR HRO FO SRC
- Genuine Leather Upper with Nylon
- Gravity® G- II double density outsole
- Non-metallic toe cap/mid-sole
- Size range: 36-48



T0214N Panther S3 HRO SRC

- Genuine Black Leather Upper
- Gravity® Sole Flex dual density outsole
- Effective grip design outsole
- Non-metallic toe cap / midsole
- Size range: 36-48



100511

- Oiled Full Grain Cow Leather
- Non-metallic toecap/midsole
- Outsole: Nitrile Rubber
- EN20345:2011 WR S3 HRO SRC
- Size range: UK 6-13



106011

- Lightweighted Mesh Fabric
- Non-metallic toecap/midsole
- Outsole: EVA/Rubber
- EN 20345:2011 S1P SRA
- Size range: UK 6-12



106018

- Premium Nubuck Leather
- Steel toecap/midsole
- Outsole: TPU
- EN 20345:2011 S3 WR SRA
- Size range: UK 6-12



106027

- Tan Premium Nubuck Leather
- Steel toecap/midsole
- Outsole: TPU
- EN 20345:2011 S3 WR SRA
- Size range: UK 6-12



10075



US尺碼：男裝M4-13 / 女裝W6-W12

Unisex Bistro Clog Feature:

採用CrosLite™泡沫鞋墊，柔軟輕身，承托舒適，加上Crocs Lock™專利防滑鞋底，全塑膜，容易用肥皂和清水清潔，包趾設計，腳背部位材料加厚，以保護足部不受傷害。通過ASTM F2913-11檢測，並符合CE認證符合或超過EN ISO 20347:2012, OB, SRC



200022/黑 歐洲尺碼: 39-47 (沒有半碼)

抗濕滑、抗油大底刻痕；緩震最佳；寬敞設計；舒適透氣



76455/黑 或 白 歐洲尺碼: 35-42 (沒有半碼)

抗濕滑大底刻痕設計；緩震大底，抓地耐磨；中掌著地



符合標準: EN ISO 13287:2019 SRC



SLIP RESISTANT

Types of Chemical Safety Cabinets 化學品安全儲存櫃類型

備有不同尺寸 / 容量及手動 / 自動門 可供選擇

					
Flammable 易燃液體	Combustible 可燃液體	Corrosive 弱腐蝕性液體	Toxic 毒性化學品	Pesticides 殺蟲劑安全	Polyethylene Corrosive 強腐蝕性液體



■ WA710103
鋼制智能氣瓶櫃
(採用1.2mm厚鍍鋅鋼材)



■ SE830450
EN耐火安全櫃
TUV 認證
防火等級(分鐘): 30/60/90



■ WA930450Y
PPE 儲存櫃



■ WA810115 (油桶型)
115Gal



■ WA810450 45Gal



■ WA810190 19 Gal
台下式



■ WA3810170 17Gal
背負式



■ WA810100 10Gal



■ ACP80002 22Gal

■ 另選購配件



複合式洗眼器



型號	主體材料	面盆	花灑罩	建議使用水壓
WG7053F	304不鏽鋼	304不鏽鋼	304不鏽鋼	210kPa 或 2.1bar 或 30psi
WG7053FY		AES塑料	AES塑料	
WG7053FG		304不鏽鋼	304不鏽鋼	

立式洗眼/臉器



型號	主體材料	面盆	建議使用水壓
WG7033F	304不鏽鋼	304不鏽鋼	210kPa 或 2.1bar 或 30psi
WG7033FY		AES塑料	
WG7033FG		304不鏽鋼	

壁掛式洗眼/臉器



型號	主體材料	面盆	建議使用水壓
WG7023	304不鏽鋼	304不鏽鋼	210kPa 或 2.1bar 或 30psi
WG7023Y		AES塑料	
WG7023G		304不鏽鋼	



緊急沖淋房

制造依據為“CE-DIN12899-UN19608”標準，當發生化學液體或有毒物質噴濺到工作人員身體、臉部、眼部或發生火災引起工作人員衣物着火時，緊急沖淋器能迅速將危害降到最低程度。洗眼器噴頭配置的橡膠罩具有防護作用，即防止人家和金屬頭直接發生碰觸，避免二次傷害。

型號	主體材料	流速	建議使用水壓
WG7054H	304不鏽鋼	洗眼:10L/min 沖淋:80L/min	3-6bar

手持式沖洗器



WG7011R WG7012R

型號	主體材料	流速	建議使用水壓
WG7011R	銅	6L/min	3-6bar
WG7012R		10L/min	

推車式洗眼器



(WG6000A + WG005)
主體材料: PE
流速: 2.6L/min
容量: 60L/16Gal

洗眼器洗手池



WG70302
主體材料: 304不鏽鋼
建議使用水壓: 210kPa

便攜式洗眼器



WG6000B WG6000A

型號	流速	容量	包裝尺寸
WG6000A	2.6L/min	60L/16Gal	750(H) x 436(W) x 435(D)/mm
WG6000B		30L/8Gal	635(H) x 357(W) x 360(D)/mm

聚乙烯盛漏平台 (叉車適用)



SPP102



30(H) x 130(L) x 66(W)/cm (2桶)
承重量: 1500kg
盛漏量: 120L




SPP102H

45(H)x131(L)x67(W)/cm (2桶)
承重量: 2000kg
盛漏量: 220L



SPP103-2



16(H) x 131(L) x 131(W)/cm (4桶)
承重量: 2500kg
盛漏量: 100L



SPP104-2

(四向操作)
30(H)x132(L)x131(W)/cm (4桶)
承重量: 3000kg
盛漏量: 265L

鋼制盛漏托盤 (叉車適用)



SPM202

36(H) x 125(L) x 70(W)/cm (2桶)
承重量: 2000kg
盛漏量: 180L



SPM204

(四向操作)
36(H) x 136(L) x 130(W)/cm (4桶)
承重量: 3500kg
盛漏量: 350L


聚乙烯盛漏平台 (叉車不適用)



SPP401



15(H) x 68(L) x 68(W)/cm (1桶)
承重量: 600kg
盛漏量: 42L



SPC SC-SD2

6"(H)x52"(L)x26"(W) (2桶)
承重量: 1125kg
盛漏量: 80L

拼接式聚乙烯盛漏平台



SPP101-2

20(H) x 128(L) x 64(W)/cm
承重量: 1500 kg
盛漏量: 90L



聚乙烯盛漏托盤斜坡



SPP012

15(H) x 120(L) x 80(W)/cm
承重量: 454kg
*配有金屬掛鉤可牢固的連接斜坡和平台
可作為盛漏工作站運輸容器的出入口, 搬運更省心



SPP001

30(H) x 120(L) x 80(W)/cm
承重量: 454kg
*配套盛漏托盤的斜坡, 方便大型物件盤運

手推車



SPP013

31(H) x 131(L) X 63(W)/cm



泄漏應急處理桶套裝

95加侖吸附量最高可達:80 Gal/302 L



SYK950(通用型)



SYK951(化學品)



SYK952(吸油)

20加侖吸附量最高可達: 21.5 Gal/ 81 L



SYK200(通用型)



SYK201(化學品)



SYK202(吸油)

便攜式溢漏應急處理套裝

適用於小規模泄漏事故

吸附量最高可達: 11.5 Gal/43.5 L



SKIT001G(通用型)



SKIT001Y(化學品)



SKIT001W(吸油)

吸附材料



選擇白色 - 吸油專用
專用於吸收油污，不吸水

選擇黃色 - 防化類
特別用於應對吸收酸性與腐蝕性液體，或其它
危險不明的液體(油、水劑均能吸收)

選擇灰色 - 通用型
油、水劑均能吸收

吸附棉片



易撕式

CP0001Y / OP0001W / UP0001G
吸附量:16 Gal/60L (54*42*23cm)
CP0002Y / OP0002W / UP0002G
吸附量:32 Gal/120L (52*42*42cm)



抽取式

CP0003Y / OP0003W / UP0003G
吸附量:16 Gal/60L (42*35*30cm)



吸附棉條

CS0001Y / OS0001W / US0001G
吸附量:15 Gal/57L (D*L 7.6*120cm)

防火金屬罐



SCAN001R/SCAN001Y



SCAN002R/SCAN002Y



SCAN003R/SCAN003Y



SCAN004R/SCAN004Y

Safety Cans

Capacity (Gal/L)	Certification	Ext. Dimensions (HxD/cm)	Packing Dimensions (HxWxD/cm)	Red Model TYPE I	Yellow Model TYPE I	Red Model TYPE II	Yellow Model TYPE II
2.5/9.5	CE	26x29	29x32x32	SCAN001R	SCAN001Y	SCAN003R	SCAN003Y
5/19	CE	40x29	43x32x32	SCAN002R	SCAN002Y	SCAN004R	SCAN004Y



火焰消除網，防止閃燃



配備接合纜或接地導線，轉移液體，安全管控



底座特殊紋路設計，盛裝液體時受力均衡



自動閉合式密封蓋



輕鬆便攜



配合安全櫃使用

防火垃圾桶

Oily Waste Cans						
Capacity (Gal/L)	Ext. Dimensions (H/D/cm)	Packing Dimensions (HxWxD/cm)	Steel Dolly for Oily Wastes Cans		Red Model	Yellow Model
			Dolly Model	Ext. Dimension (DxH cm)		
6/22.6	40x30	46x42x42	WAS006	32x8	WA8109100	WA8109100Y
10/38	46x35	52x47x47	WAS0010	37x8	WA8109300	WA8109300Y
14/52.9	51x41	57x51x51	WAS0014	43x8	WA8109500	WA8109500Y
21/79.3	60x47	63x56x56	WAS0021	49x8	WA8109700	WA8109700Y



滑軌

生化垃圾桶



WA8109200

WA8109600



WA8109200Y

WA8109600Y



廢物處理袋 SYB010S



Biohazard Wastes Cans

Material	Capacity(Gal/L)	Certification	Diameter(cm)	Packing Dimension (H*W*D/cm)	Red Model	Yellow Model
PE	6/22.7	CE	300	42x38x38	WA8109200	WA8109200Y
PE	14/53	CE	380	50x53x48	WA8109600	WA8109600Y

煙蒂收集器

重量: 3.2kg 尺寸:89.5(高)X34.5(寬)X34.5(深)cm



內置鋼桶



CBR8101(紅色)



CBR8102(灰色)

水銀清理工具



Spillfyter Mercury Spill Kit
(2) Mercury Sponges/
with containment Jar,
500g Amalgamation
Powder,
水銀清理工具套裝

520260



Mercury Sponge
Size: 2.5" X 1"
水銀清理海綿

49Y398

Classic Safety Cabinets For Flammables



893020
Capacity: 30 gal
Size: 43" (W)X44" (H)X18" (D)



894520
Capacity: 45 gal
Size: 43" (W)X65" (H)X18" (D)



896020
Capacity: 60 gal
Size: 34" (W)X65" (H)X34" (D)



892220
Capacity: 22 gal
Size: 23.25" (W)X65" (H)X18" (D)

Under counter



892320
Capacity: 22 gal
Size: 35" (W)X35" (H)X22" (D)

Piggyback



891720
Capacity: 17 gal
Size: 43" (W)X24" (H)X18" (D)

Transportable Mini



891220
Capacity: 12 gal
Size: 23.25" (W)X35" (H)X18" (D)



891520
Capacity: 15 gal
Size: 23.25" (W)X44" (H)X18" (D)

便攜式洩漏處理套件



經濟型 Spill Kit
黃色耀目的PVC袋,
適用於小規模洩漏事故,
SKA-PP 通用型(ALLWIK)
SKO-PP 吸油專用(OIL ONLY)
SKH-PP 防化型 (HAZWIK)



SPC100

SPC-MAXX 吸油墊	型號	尺寸包裝
重量級	SPC100	15" X 19", 100/包
中量級	SPC300	15" X 19", 100/包



GP100

經濟型 吸附墊	型號	尺寸包裝
重量級	GP100	15" X 19", 100/包
輕量級	GP200	15" X 19", 200/包
輕量級	GP500	15" X 19", 100/包



20加侖桶裝
適合吸收少量或中等量物質
SKA-20通用型(ALLWIK)
SKO-20吸油專用(OIL ONLY)
SKH-20防化型 (HAZWIK)



UN1113

吸附墊	型號	尺寸包裝
防化學 及防油	UN1113	12"X12", 50/袋, 4袋/箱
	UN1719	15" X 19", 100/箱



吸液枕	型號	尺寸包裝
吸油專用	OIL1818	18" X 18", 16/箱



95加侖超大包裝容器套件
高強高質量回收桶,
適合大規模洩漏事故,
SKA-95通用型(ALLWIK)
SKO-95吸油專用(OIL ONLY)
SKH-95防化型 (HAZWIK)



SPC810



SPC510

吸油圍欄	型號	尺寸包裝
海上專用	SPC810	8" X 10', 4/包
	SPC510	5" X 10', 4/包
	ENV810	8" X 10', 4/包
	ENV510	5" X 10', 4/包



Large Spill Track
超大型聚乙烯箱, 耐化學腐蝕,
防水, 可裝輪子
SKA-LT通用型(ALLWIK)
SKO-LT吸油專用(OIL ONLY)
SKH-LT防化型 (HAZWIK)



OIL 430



AW430



HAZ 412

長條吸 附袋	型號	尺寸包裝
吸油專用	OIL430	3" X 4', 30/箱
防化型	HAZ412	3" X 4', 12/箱
通用型	AW430	3" X 4', 30/箱

460g



XP-3310II



IP67防水結構

可燃氣體探測器及多氣探測器(可燃氣體+氧氣)

- 堅固防撞設計，通過7米下墜測試
- 最多可以安裝5個相關數據(選項)
- 轉換為32種氣體濃度
- IP67防水結構
- 尺寸W91 x H164 x D44mm
- 防爆結構: ATEX: Ex II 1G Ex ia da IIC T4 Ga*1
IECEX: Ex ia da IIC T4 Ga*1
CE (ATEX、RoHS 和 RE 指令)
- 適用於監測爆炸風險，石油和天然氣、發電站、氣站巡檢、石化、化工廠、鍋爐房及汽車業等

可選配件:



短探管



夾子



喉管(可選: 1m/2m/3m/5m/10m)



叉電器

XP-3310II	XP-3340II	XP-3360II	XP-3360II - W
可燃性氣體及溶劑蒸氣 檢測範圍: 0-100%LEL	高濃度氣體 工業及天然氣體 檢測範圍: 0-100vol%	高靈敏度氣體 可燃性氣體及溶劑蒸氣 檢測範圍 0-5,000 ppm或0-10,000 ppm	高靈敏度氣體 可燃性氣體及溶劑蒸氣 檢測範圍 0-100.0% LEL 啟用以 ppm 為單位顯示
XP-3380II	XP-3318II	XP-3368II	XP-3368II-W
氧氣 檢測範圍: 0-25 vol%	複合氣體+氧氣 檢測範圍:0-100vol%/ 氧氣: 0-25 vol%	可燃性氣體及溶劑蒸氣+氧氣 檢測範圍: 0-5,000 ppm或 0-10,000 ppm (/氧氣: 0-25 vol%)	可燃性氣體及溶劑蒸氣+氧氣 檢測範圍: 0-100%LEL 氧氣: 0-25 vol% 啟用以 ppm 為單位顯示

毒性氣體檢測器



XPS-7

- 通過更換傳感器單元，可用於多種半導體氣體
- 盒式傳感器單元無需檢測校正
- 應用於半導體/石油化學工廠、工廠的洩漏檢查及濃度測量

List of Detected Gases

Type	Gas	Full Scale	Type	Gas	Full Scale	Type	Gas	Full Scale
XDS-7NH	NH ₃	100ppm	XDS-7GH	GeH ₄	1ppm	XDS-7HS	H ₂ S	50ppm
XDS-7SH	SiH ₄	25ppm	XDS-7CL	Cl ₂	5ppm	XDS-7CO	CO	250ppm
XDS-7DC	SiH ₂ Cl ₂	25ppm	XDS-7CF	CF ₄	1ppm	XDS-7DS	SnH ₄	25ppm
XDS-7AH	AsH ₃	250ppb	XDS-7HC	HCl	25ppm	XDS-7F2	F ₂	5ppm
XDS-7PH	PH ₃	1ppm	XDS-7HF	HF	10ppm	XDS-7O2	O ₂	1ppm
XDS-7BH	BH ₃	500ppb	XDS-7HB	HBr	10ppm			
XDS-7SE	H ₂ Se	250ppb	XDS-7NO	NO	100ppm			

Contact us for information on gases not included in the table.



氣味水平指示器

- 各種氣味和氣味成分
- 測出氣味強度與臭氣指數
- 氣味水平的簡單測量
- LCD數字指示
- 應用於空氣淨化器、除臭設備的性能檢查、工廠廢氣的氣味測量及食品和香料質量控制

(臭味指數檢測器) 用途例



XP-329IIIR

應用: 相對比較



氣體洩漏探測儀

- 可燃性氣體/ CFC
- 輕便 W38 x H130 x D32mm, 重量 190g
- LCD顯示, 閃爍警報燈
- 可檢測到低至10 ppm (氟利昂氣體為30 ppm)
- 可檢測2種氣體 (型號:XP-702IIIS-A / XP-702IIIS-F)
- 應用於檢查燃氣出口、橡膠管和空調管的接頭、追蹤微小的氣體洩漏
- 新增照明燈 方便在黑暗的地方工作
- Ex ia II BT3 (本質安全防爆構造)



XP-702IIIS



■ XP-702IIIS-A (2種)

■ XP-702IIIS-F (CFC / 可燃性氣體)


■ XP-702IIIS-B (1種) (Town gas, LPG etc)

XA 4400 II (4合1) 檢測儀

氧氣/可燃性氣體/硫化氫/一氧化碳

4種氣體，同時檢測，同時顯示

- 傳感器壽命2年
- 乾電池，充電池
- 一節電池即可工作一週
(可連續使用約40小時)
- 大音量報警聲
- 燈光、振動方式報警
- 小型W70 X H72 X D26，輕量130g
- 耐衝擊性的大幅度提高
- 防水防塵構造(保護等級IP67)
- 本質安全防爆構造 Exia IIC T3 Ga
- 應用於燃氣、石油化工、汽車、船舶、鋼鐵、通信及建造業等

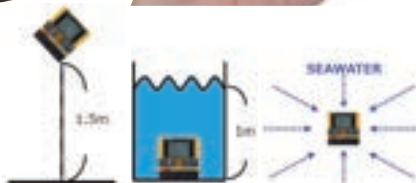

39

氣體探測儀 Gas Detector

模塊化設計

2種電源方式供選擇




泵組件套裝



充電規格套裝



使用8氣體導入管 套裝時(選購品)



數據收集套裝




XP-302M複合型 (4合1) 檢測儀

- 傳感器組件的交換方式
- 無須年檢/校對
- 輕便：870g
- 備有多種配件選擇
- 防爆結構 Exibd IIB T3
- 應用於水槽/隧道等地下工程、土木工程、電力、通信、石油、船內作業及建造業等

特大LCD顯示



LCD顯示/紅燈閃爍

蜂鳴器警報

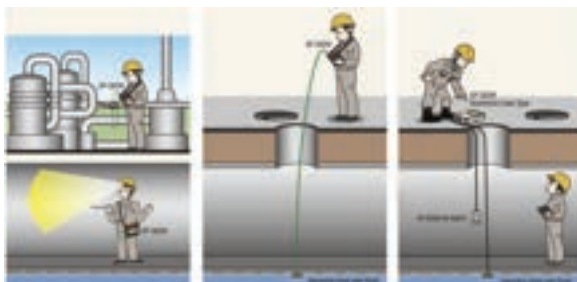

迷你系列

- 可連續使用500小時
- 提供響亮的蜂鳴
- 輕薄設計約75g，W65 x H64 x D22mm
- Exib IIB T3 (TIIS)

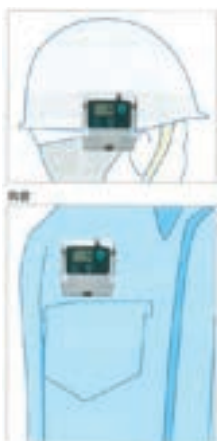

- XO-2200 (O₂)
- XS-2200 (H₂S)
- XC-2200 (CO)
- XCO-2200 (CO/O₂)
- XOS-2200 (H₂S/O₂)

鐵粉濃度計 SDM 72

- 通過測量軸承周圍潤滑脂中鋼塵量
- 在磨損引起的震動值變高之前，也能夠診斷軸承狀況
- 操作簡單，只需通過油脂樣品進行測量
- 檢測範圍 0-5.000%Wt
- 應用於潤滑軸承、齒輪等磨損狀況的簡單診斷和監測



潤滑油鐵粉濃度計 SDM 73

- 潤滑油中鋼塵濃度
- 可根據潤滑油中的鐵粉濃度對軸承、齒輪、油缸等的磨損狀態進行診斷
- 檢測範圍 0-19999wt ppm
- 應用於旋轉設備中軸承、齒輪、氣缸等磨損狀況的簡單診斷
- 監測液壓油和磨削油中的鋼鐵粉塵污染



固定式檢測警報系統



UV-810

VAS蜂鳴器



V3指示器

壁掛式結構、內置備用電源


可燃性氣體、毒氣、半導體材料氣體、氧氣

UV-810 型氣體檢測警報器為壁掛式（儀錶板嵌入式）。是由V3 系列的指示計元件、報警元件與各種氣體檢測部組成的緊湊型系統

- 緊湊型設計
- UVB-810為標準的3、6點式配置
UV-810型為9、12、15點式的配置
- 輸入電源的種類豐富
- 可以搭載齊納式防爆柵
- 可以設計為兩段報警系統
- 可以通過V3系列元件進行組合搭配，對各種氣體進行檢測並警報

可連接報警器

■ UV-810 (多點檢測)	■ V3系列 (面板嵌入式)	■ NV-100C· NV-100H (單點檢測)
--------------------	-------------------	------------------------------

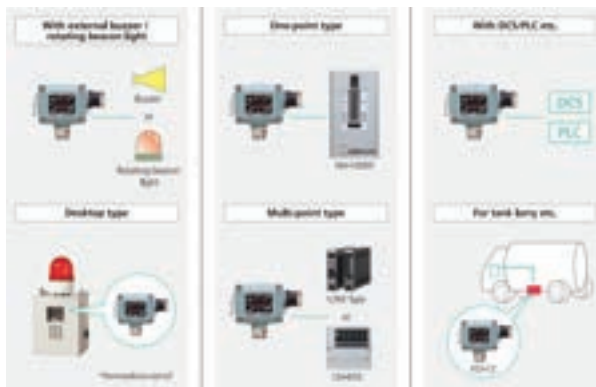

NV-100系列
(一點式)

- 可燃性氣體、氧氣、毒性氣體、半導體材料氣體
- 可以連接多種氣體檢測部、氣體警報器
- 通過警報燈的燈光和【嗶嗶嗶】聲音等告知氣體的洩漏
- 停電時，蓄電池供給保安電源。停電後可以進行60分鐘以上的連續監控
- 石油化工、鋼鐵、半導體製造、土木建築

■ NV-100C可燃性

■ NV-100D毒性

■ NV-100H (高靈敏度)可燃性

■ NV-100S氧氣



KD-12

帶濃度顯示功能，在現場可讀取濃度

對象：可燃性氣體、氧氣、毒性氣體、毒氣、城市天然氣

- 使用磁棒操作，維護簡單
- 單元式感測器，方便替換
- 隔爆型外殼設計Ex d IIC T6 Gb
- 防水·防塵構造，保護等級IP66

應用於石油化工、鋼鐵、土木建築、機械製造



KD-5A/5B

對象：可燃性氣體、城市天然氣、氫氣、毒氣

適用：環境、石油化工、鋼鐵、土木建築、機械製造
防爆結構：d3aG4 / d2G4

防凍服



1700 Extreme PAC Boot

- The BOA Fit System
- Anti-Slip RefrigiWear outsole
- ASTM composite safety toe
- VitaComfort anti-fatigue
- gravity-fed moisture management system
- Waterproof
- Incredibly lightweight



1240 PolarForce Hiker Boots

- 800g Thinsulate® insulation
- Vibram® Q765 Dual Density outsole with IceTrek™
- Waterproof
- HiVis reflective trim
- ASTM composite safety toe
- VitaComfort® anti-fatigue
- gravity-fed moisture management system



1230 Ice Viking

- 600g Thinsulate® Ultra insulation
- ASTM composite safety toe
- HYDRY® waterproofing system
- VitaComfort® anti-fatigue
- gravity-fed moisture management system



1210 Barrier

- 9" Full Grain Leather upper
- Anti-Slip RefrigiWear® outsole
- ASTM composite safety toe
- VitaComfort® anti-fatigue



0518 Polarforce Glove

- 200g Thinsulate® plus foam insulation
- Silicone dot Grip Assist pattern on palm
- Neoprene cuff
- Touchscreen



0283 Waterproof Abrasion Glove

- Waterproof barrier
- PVC abrasion pads on fingertips and palm
- Safety cuff with heavy-duty knit wrist



2795 Glove

- 200g Thinsulate® plus foam insulation with fleece lining
- Durable, cut-resistant palm
- Silicone grip pattern on palms
- Touchscreen



150P Insulated Pallet Cover

- Polyester high-loft fiberfill insulation
- Mildew-and stain-resistant inside and out
- Hook & loop closure on all four sides provide easy access to your perishables
- 9" x 12" ID document pocket
- Water-repellent



0063 Fat Cap

- 4-layer acrylic knit provides superior warmth



0059 Silver Magic Neck Gaiter

- Micro denier acrylic knit
- Covers nose, mouth, ears, neck
- Antimicrobial



0047 Open Hole Mask

- Double-layer acrylic knit
- Long neck for draft protection



0081 Iron-Tuff Snap-on Hood

- Water-repellent, windtight finish
- Knit wind seal around face
- Self-locking drawstring
- Snaps to 0358,0343 jackets

Iron-Tuff®



- 11.25 oz. RefrigiFill polyester insulation
- Tear and abrasion-resistant 400 denier nylon outershell
- Water-repellent, wind-tight finish
- Bounds seams seal out drafts
- Heavy-duty knit cuffs

RefrigiWear

0358 Siberian



- Heavy-duty brass zipper with storm flap
- Meets EN 342:2017
- Snaps Hood 0081 (optional)

0385 BiB Overalls



0381 Overall with Hood



- 2 oversized insulated front pockets and chest pocket
- Thigh-high leg zippers with snap-close storm flap



0360 ICE Parka

- Sewn-on fleece-lined hood with knit wind seal
- Heavy-duty brass zipper with storm flap

0343 Visibility Siberian

- 2" 3M® Scotchlite® reflective tape around waist and forearms
- Snaps for 0081 Hood (optional)



0399 Ice Vest

- Stretch knit side gussets for comfort
- 2 insulated front pockets
- Extended length back



0323 Women's Coat

- 2 exterior insulated pockets with reflective piping
- Lower neckline with soft fleece collar



Extreme

0796 Jacket

ANSI Type R, Class 3
CSA Class 2, Level 2



- Hivis Extreme softshell
- Water-repellent, wind-tight finish
- Soil-resistant Teflon® coating

0797 Bib Overalls

ANSI Class E



0790 Jacket

- Dual front-zipper system to regulate temperature
- When paired with 0795 Bib overall Meets EN 342:2017



8480 Sweatshirt

- Three layers for warmth and comfort
- Performance-Flex on elbows for improved movement
- Abrasion-resistant panels on sleeves and kangaroo pocket



8050 Chillbreaker™ Plus Jacket

- Water-repellent, wind-tight coating
- Reflective piping accents



0525 Cooler Wear™ Jacket

- Water-repellent, ripstop nylon



0473 Women's Pure-Soft Jacket

- Water-repellent and wind-tight finish



0496 Softshell Jacket

- Water-repellent, wind-tight finish
- 2" Silver 3M® Scotchlite® reflective tape
- ANSI Type R, Class 2, CSA Class 2, Level 2



9740 Fleece Jacket

- Water-repellent, wind-tight finish
- Abrasion-resistant panels on sleeves, waist and shoulders



8454 Sweatshirt

- Three layers for warmth and comfort
- 2 Hand-warmer pockets
- 2-Stall pencil pocket on right sleeve
- Hood with high neck

41

防凍服 RefrigiWear



火狐狸Fire Fox 輕便時尚舒適防火阻燃服



33-8200 (連身工作服)
EN470-1 S-XXL



33-6830 (上身服)
EN407-1, S-XXL



33-9700 (工作褲)
EN407-1 S-XXL



44-2136
燒焊皮圍裙
91cm(L) x 61cm(W)
EN 11611



44-1847 帶袖圍裙
100cm(L) x 61cm(W)
L, XL



魔術貼設計
44-2319皮手袖 (48cm)



44-2106 (15cm)
金黃色皮護腳蓋



10-2101 (34cm)
燒焊手套, 外層採用耐磨、
高性能隔熱效果 的牛二層皮
制成, 實惠耐用
EN12477 L - XL



10-2209 (25cm)
燒焊手套手套由牛二層A級
頸皮所制, 合燒焊, 鑄造 業、
鋼鐵、搬運工作等
EN388 L - XL



10-2385 (35cm)
耐高溫反射鋁PFR RAYON
系列, 具有防火阻燃和反射
熱流作用
EN 12477 L - XL



10-2900 (35cm)
阻燃的杜邦Kevlar 4防火線
縫制, 有防火阻燃和反射熱
流作用
EN 12477 L - XL



EASYWELL WH4000
變色龍燒焊面罩
變色前: DIN 4 度
變色後: DIN 9-13 度



Blue Eagle 藍鷹
AW7R 變色龍
Shade 4-12, EN379,
EN175 ANSI Z87.1

燒焊防護屏



50-3066
金黃色玻璃纖維
1.73 x 1.73m



*50-3072 (卷裝)
1.83 x 46m
1017g/m² 韌化玻
璃纖維, 可抗溫
538° C



55-6466 (1.74M x 1.74M)
橙紅色燒焊屏障



55-7466 (1.74M x 1.74M)
深綠色燒焊屏障



55-8166 框架
1.8M x 1.8M



50-1833
沙漠色玻璃纖維
0.81 x 0.81m



*50-1836 (卷裝)
0.91 x 46m
610g/m² 韌化玻
璃纖維, 可抗溫
1260° C



屏障組合

可用索帶安全固定在組合框架上或可懸掛在軌道上組成活動的燒焊屏風



FX-1 消防手套



防火沙筒
紅色鐵罐直徑9" x 9" H



防火氈
4' x 4'



鐵筆



斧頭



老虎剪



滅火筒 CO₂、粉劑、
水劑、泡劑

Chain Saw Protection



ProVest II
JE-70(Size: S-L)



ProChaps



91 series
-Full Wrap-around calf protection
-Heavy-duty 1,000 Denier Cordura
-Standard ASTM F-1414, ASTM F-1897-2008
-Lengths: 33", 36", 39"



ProGuard
CU-30L
Clear Lexan



ProGuard
CU-60R-V
Nylon screen visor /
Steel screen visor +
Quick snap Ear Muff




ProGlove
JEGLV-50(Size: S-L)

Cooling product



降温風扇背心

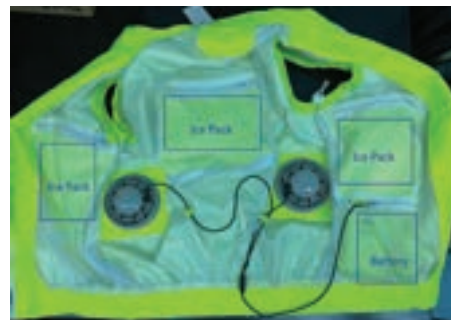

掛腰風扇



充電線



掛繩



噴霧風扇



冷風機



清涼巾



冰絲手袖(30cm)



凍領帶

自動充氣脖掛式救生衣

With 33g CO₂ Cylinder
Weight 重量 ≤ 0.75kg
Buoyancy 浮力 ≥ 150N 或可選275N
Fabric 材質: Polyester+ Oxford
Standard 標準: BS EN ISO 12402-3:2006+A1:2010



ES639-716

充氣後圖示

人體工學設計
柔軟布料配帶更舒適



透明視窗一目了然



有年檢提示標籤

反光物料包邊
黑暗環境下能提高能見度



備有緊扣
可自由調較鬆緊



ES639-717



ES639-721 防火救生衣
採用美國進口防火布料



Rearm Kit
藥片及氣瓶套裝
(補充裝)



藥片



救生衣燈
(遇水會自動閃爍)

充氣後圖示



拋投式自動充氣救生圈
浮力: 150N
承重公斤: 150公斤
認證: CE/CCS
標準: BS EN ISO12402

充氣裝置
遇水自動激發裝置充氣, 三秒內完成充氣



充氣前圖示

LAUZAS



Alpha 71100



Sigma 71096



船用救生衣
浮力(kg) ≥ 10.5



救生圈28"



救生圈存放箱



救生圈+存放箱+浮索



救生圈浮繩索
連膠桶
規格: 8mm x 30m



救生吊船

CSM



充氣橡皮艇 (中國製)
Inflatable Rubber Boat
可選5至12人尺碼

Confined Space 密閉空間

Self Contained Breathing Apparatus 壓縮空氣呼吸器



Scott Sigma 2
1200L 200 BAR
Steel Cylinder (UK)



MSA AirXpress One複合纖維氣樽連背架
300 BAR
Single 6.8L carbon composite cylinder



GMI PS200 (PS241) 4合1氣體測試儀 (UK)
重量: 230g
最多可檢測4種氣體 (CO, O2, 可燃氣體, H2S)
內置個人警報系統 (全港獨有)
有記錄系統
充電式
Approvals: ATEX II 2G Ex ia d IIC T4 Gb
IECEX Ex ia d IIC T4 Gb
ATEX II 1G Ex ia IIC T4 Ga*
IECEX Ex ia IIC T4 Ga*



MSA Motion Scout
個人警報器




防爆對講機



2690 防爆頭燈連頭帶



KOREL 安全帽連Y型帶

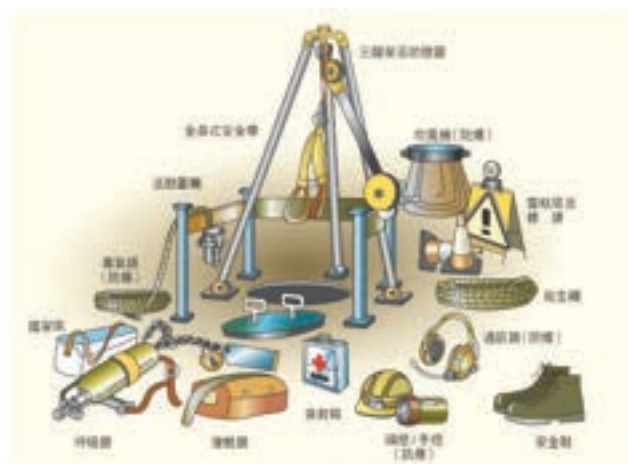

手提藥箱



四摺圍欄

型號: R02
Size: 55.9cm (W) x 75cm (H)



防爆電筒



PN800三腳架(7 ft.)
Adjustable height from 1.15m to 2.15m
Maximum Load Capacity : 500kg
Standard : EN795 TYPE B



PN801絞動器
Galvanized Steel Wire Rope of Dia. 4.5mm
Length of Cable 20m
Capacity : 135kg
Standard : EN 1496 CLASS A



PN 25 拯救式安全帶
Weight : 1400gm
Standard : EN361, EN1497



纖維頭安全鞋



手提吹風機連喉
風機可選 8"-24" 直徑
喉長: 5m / 10m



獨立救生繩織眼加鐵天保(繩頭+繩尾)



可摺合擔架床



Laerdal 手動即棄復甦器

Instrument 儀器

Sound Level Meter 噪音錶



Lutron SL-4001 (Type 2)
標準: IEC 651



Lutron SL-4022 (Type 1)
標準: IEC 651



GA116I (Class 1)
標準: IEC 61672-1-2002



micro LM-100
Laser Distance Meter



Specifications
Measurement Accuracy: $\pm 1/16"$ (1.5 mm).
Range: 328 ft. (100 m).
Measurement Units: Inches, feet and meters.
Measurement Calculations: Area, volume and indirect measurement calculations.
Power Source: 2 AAA batteries (included).
Ruggedness: IP 54 dust proof, splash proof.



Lutron LX-107HA Lux Meter



Lutron HD-3008 溫濕度儀



MARK X 酒精測試機連測試管



micro CA-100
Inspection Camera



Specifications
Display: 3.5" Color LCD (320 x 240 Resolution)
Lighting: 4 Adjustable LEDs
Cable Reach: 3' (Expandable to 30' with Optional Extensions)
Waterproof to 10' (IP67)
Camera Head: 3/4" (17mm)
Video Output: RCA (3' Cable Included)
TV-Out: PAL/NTSC
Operating Temp: 0° C ~ 50° C
Storage Temp: -20° C ~ 60° C
Storage Humidity: 15% ~ 85% RH
Depth of Field (DOF): 10mm ~ (Infinity)

功夫梯及圍欄梯台



纖維功夫梯連圍欄
SPL-NFB008




SPL-NFB 纖維功夫梯連圍欄



鋁質功夫梯



纖維圍欄梯台(可調較不同組合)



Type IAA
375 lbs.

平台梯



PL-SFY 纖維平台梯
(2級至8級)



PL-SAY 輕裝鋁質平台梯
(2級至6級)

工作台



DA 折疊式工作台(有輪)



DBX-3B (附扶手)



DB 組裝式作業台
(扶手可自由組合拆卸)

組合梯



GCE 多功能組合鋁梯
(6級至12級)



(可調較不同組合)



Velocity 多功能組合梯
(3級至6級)



(可調較不同組合)

A字梯及雙截纖維雲梯



扶手鋁梯(3級至8級)



TR-DFB 雙面纖維梯
(2級至16級)



RZB 輕身鋁質雙面梯
(2級至6級)



RGF 日本雙面纖維梯
(3級至12級)
耐電壓20000V



EX-NFB 雙截纖維雲梯
(8級至16級)



Kudo手搖式高空作業平台

4.6米
Style no(貨品編號): KUDO46
Maximum Load (最高負重): 120KG
Weight (機身淨重): 220kg
Height (平台離地高度): 4.6M
Dimension(摺疊後機身尺寸):150 x 84x 199cm

3.2米
Style no(貨品編號): KUDO32
Maximum Load (最高負重): 130kg
Weight (機身淨重): 145kg
Height (平台離地高度): 3.2m
Dimension(摺疊後機身尺寸): 120 x 75 x 196cm

CE Certified (獲得CE認證)*:

Test Standard:

EN 60204-1:2006+A1:2009, EN ISO 12100-2:2003+A1:2009

- Test Procedure:

Complies with EN 60204-1:2006+A1:2009,

EN ISO 12100-2:2003+A1:2009

- Warranty Period: One year limited warranty

- Included Form 4 & 5 Load Test Certificate (for 1st year)

- Included regular inspection and maintenance x 2 times (for 1st year)

- Free on-site training will be provided for not more than 15 person



膠板手推車

Model	Net Weight	Max Load Capacity	Size (W x L)
DR100 組合膠板車	3.6 kg	100 kg	400 x 600mm
DR150 膠板車	9.6 kg	120 kg	480 x 740mm
DR150T2 雙層膠板車	17.2 kg	120 kg	480 x 740mm
DR150T3 三層膠板車	23.1 kg	120 kg	480 x 740mm

DR150 / 300

DR150T2 / 300T2

DR150T3 / 300T3



日本鐵板手推車

另有不同款式



單柄鐵板手推車(可摺式)



雙層鐵板手推車



油桶搬運車



手腳車



臺灣製造
最大承重150KG
已通過歐洲安全壓力測試



Miracle Step Stool 腳踏
型號: MV-T7
最大承重: 150kg
Standard : EN14183 (TUV; GS)

Carl Step Stool 腳踏
型號: GS1
最大承重: 200kg



鋁質摺合手推車
負重: 68kg



單剪式平台腳車
載重量: 1650Lbs
Size: 總長x闊x高: 1275 x 520 x 1130mm

Automatic External Defibrillator (AED) 全自動體外除顫儀



Lifeline Auto Defibrillator 廣東話或英語版
簡單易用
特長電池壽命可長達5年
產地: 美國



Rescue Pack 急救包



金屬指示牌
280mm(W) x 130mm(D)
x 230mm(H)



小童電擊片
連接駁頭



成人電擊片
連接駁頭



Powerheart AED G3 Elite
廣東話或英語版




成人電擊片



小童電擊片



Storage Box



Plastic Box



洗眼水 500ml 連眼杯 (支裝)



洗眼水套裝 (可掛牆)



手提橙色藥箱(可掛牆)

中箱: 適合1-9人、10-49人
32.5 cm(L) x 24 cm(H) x 15 cm(D)

大箱: 適合50-100人
45 cm(L) x 33 cm(H) x 15 cm(D)



手提綠色藥箱
36cm(L) x 27cm(H) x 8cm(D)



掛牆白色急救藥箱
28cm(L) x 28cm(W) x 10cm(D)



大急救鋁質藥箱
細箱: 30.5cm (L) x 19cm (H)x 17cm(D)
大箱: 35.5cm (L) x 22cm (H)x 20cm(D)



個人小藥包

急救用品內容符合勞工處急救指南附錄, 可配合客戶需要提供可添加藥品, 歡迎查詢報價



LSP RK704 Deluxe Portable Resuscitator with D size Cylinder

MODEL NO.: L175-010

Kit Contents:

- Uni-body regulator with constant flow (0-5LPM) and two high flow outlets
- Demand valve with 1.8M hose
- Cuffed mask
- Aspirator with 1.8M hose
- Oxygen therapy mask with 2.1M tubing
- Cylinder wrench or handwheel
- Polyethylene plastic carry case

ORIGIN: USA



即棄PVC手動復甦器



人工呼吸面片



可摺合擔架床
YDC-1A9

展開尺寸: 長215 x 闊52 x 高13cm
折疊尺寸: 長110 x 闊18 x 高10cm



普通檢查床

尺寸: 長182x闊63x高63cm



多功能輕輪椅



樓梯椅

EVACUATION CHAIR


Model: 300H

Safety working Load: 182kg

Stair Angle: 28° - 40°

Min. Allowable stair width: 600mm

Designed & Manufactured in UK



紅外線自動感應酒精噴霧機



蘆薈消毒酒精噴霧系列



酒精消毒濕紙巾



手臂式血壓計




紅外線耳溫槍



保暖銀氈

防疫產品

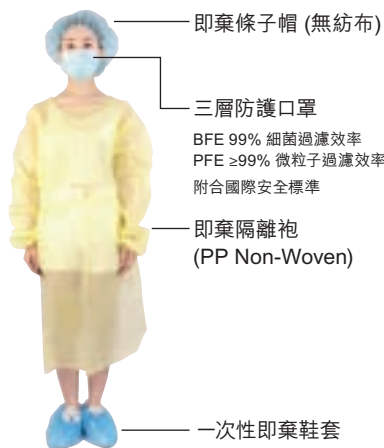

即棄條子帽 (無紡布)

三層防護口罩

BFE 99% 細菌過濾效率
PFE ≥99% 微粒子過濾效率
附合國際安全標準

即棄隔離袍
(PP Non-Woven)

一次性即棄鞋套



(包裝圖)

(包裝圖)

(Non-Woven / C.P.E.)

防化保護服連帽 (獨立包裝)

LAKELAND MicroMax NS protective coverall with elasticated hood, cuffs, waist and ankles
Style Number: AMN428E
CE Certification:
EN1073-2: against dust particles that may be contaminated with radiation
EN1149-5: against electrostatic suitable for explosive atmospheres
EN13982-1(Type 5): against hazardous airborne solid particles
EN13034+A1(Type 6): against light spray of liquid chemicals
EN14126: against infectious agents



眼部保護



Face Shield 即棄面罩

防飛沫、防唾液、防油濺
330(L) x 220(H)mm
Certification: EN166




防飛沫護目鏡 (合配帶眼鏡人士)

防霧/防割花/防靜電/防紫外光
Standard: EN166



防護眼罩

防飛沫、防唾液、防油濺
Standard: EN166



即棄眼罩

Material: PC
158mm(W) x 165 mm(L) x 5mm(H)

手部保護



酒精消毒濕紙巾



蘆薈消毒酒精啫喱系列



消毒火酒 (1 litre)
75% 酒精



Walch 消毒濕紙巾 消毒搓手液
(75片裝)



Tronex 即棄手套
S-L



免接觸紅外線探額體溫計
Color Alarm (Body Mode only)



自動紅外線測體溫儀計 (非接觸式)

- 探測方式: 額頭 / 手
- 大屏即時顯示溫度, 清晰易看
- 使用USB線供電或AA電池
- 設有高溫警鐘提示
- 高靈敏紅外線探測體溫, 0.1秒即可知道結果, 發燒會有燈光及警鐘提醒



多用途消毒噴霧機
容量: 1.8公升
噴霧流量: 70ml/分鐘



天然抗菌清潔液
100%植物性成份, 確保環境衛生、安全、無毒。

人體工學

透氣保護腰封 ETL300 (可拆除式肩帶)

Size:	
XS	25" - 28"
S	29" - 33"
M	34" - 37"
L	38" - 41"
XL	42" - 45"
XXL	46" - 49"
XXXL	50" - 53"



魔術貼設計可自由調校鬆緊

Sport-Aid 套入式護腕

Slip-on Wrist Support with Thumb Hole



Size:	
S	14-17 cm
M	17-19 cm
L	20-22 cm



護肘

CRPR-00009

Size:	
XS	20-23cm
S	23-25cm
M	25-28cm
L	28-30.5cm
XL	30.5-33cm

JASPER 護腕

FA002A
尺寸: 自由碼



ReLive開口膝蓋護膝

Size: S-L



Size	膝上圍	膝下圍
S	11.5-12.5"	10.5-11"
M	13-14"	11-12"
L	14.5-15.5"	12-13"



Relive 跪膝墊

彈性衣料, 內附保護墊, 減少跪下時膝部所受壓力
尺寸: 自由碼



可以腳部調校傾斜度



3M FR430 高級適體腳踏 (灰色)
18" X 13" X 4"



3M FR530 高級適體腳踏 (黑色)
22" X 14" X 4"



Fellowes FW8035001 可調校防菌腳踏
425(L) x 330(W) x 150-210(H) mm



OBUSFORME 護脊高背墊



OBUSFORME 護脊低背墊



使用前 使用後

人體椎天然苗線設計, 能支持背骨, 改正不良坐姿, 減輕腰酸背痛, 填補背部與椅子間的空隙, 保持正確坐姿。產品經專業醫護人員實驗證明, 能使背痛患者及因手術後導致背部不適的人士加速復原。



Insulated Rubber Mat 絕緣地蓆

Conform to: EN 61111:2010/IEC 61111:2009

Article	Roll Size (L x W)	Thickness	Class	Recommended Max Use Voltage	Proof Voltage	Withstand Voltage
BTIR 0210	10m x 1m	3mm	2	17,000 Volt	20,000 V	30,000 V
BTIR 0310	10m x 1m	3mm	3	26,500 Volt	30,000 V	40,000 V
BTIR 0410	10m x 1m	4mm	4	36,000 Volt	40,000 V	50,000 V



*可原卷或散剪發售 (以1米起計)

Insulated Rubber Mat 絕緣手套

Conform to: EN 60903:2003 + AC2:2005, EN 420:2003 + A1:2009

Type	ELS. 2.5	ELS. 5	ELS. 10	ELS. 20	ELS. 30
Class/Category	00/RC	0/RC	1/RC	2/RC	3/RC
Designation of Max. use voltage AC, V rms	500	1,000	7,500	17,000	26,500
Proof voltage kV, rms	2.5	5	10	20	30
Withstand test voltage kV, rms	5	10	20	30	40
Length, mm	360	360	360	360	360
Size	8, 9, 10, 11, 12	8, 9, 10, 11, 12	8, 9, 10, 11, 12	8, 9, 10, 11, 12	9, 10, 11, 12
Cuff	Straight	Straight	Straight	Straight	Straight

R - combination of resistance to acid, oil and ozone;
C - resistance to extremely to low temperature



絕緣手套



PVC black protection box for gloves, class 00 to 2, dimension: 470x170x150mm, weight: 400g


Electrical Insulating Blanket 絕緣氈



- Article: BNIR 010
- Class 0
- Color: Orange
- Thickness: 1.5mm
- Roll size: 10m x 1m
- Standard: IEC 61112:2009
- Max. Use Voltage: 1,000 Volt AC / 1500 Volt DC
- Proof Voltage: 5,000 Volt AC
- Withstand Voltage: 10,000 Volt AC



Insulating Rescue Stick 絕緣救援棒

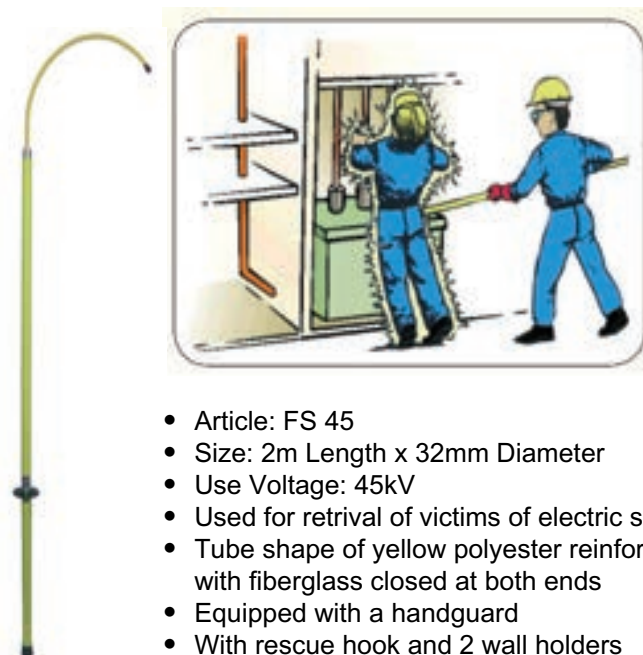

- Article: FS 45
- Size: 2m Length x 32mm Diameter
- Use Voltage: 45kV
- Used for retrieval of victims of electric shock
- Tube shape of yellow polyester reinforced with fiberglass closed at both ends
- Equipped with a handguard
- With rescue hook and 2 wall holders

Safety- walk, Flooring & Matting Solution



The Science of Walking Safety dedicated to helping you avoid injuries and reduce the risk of slips, trips and falls.

300 Series. For barefoot and shoe traffic areas	500 Series. For irregular and contained surfaces	600 Series. For light to heavy shoe traffic areas	700 Series. For extreme conditions
Non-mineral, medium textured polyethylene surface Plastic film Special adhesive	Mineral particles Aluminum backing conforms to corners and irregular surfaces	Highly durable mineral particles with low profile that helps reduce trip hazard Plastic film Special adhesive	Extra strong mineral particles prevent slipping in dirty and oily applications, reduce clean-up time Plastic film High-performance adhesive creates excellent bond to most surfaces
■ 2" or 4" x 60 ft.	■ 2" or 4" x 60 ft.	■ 2" or 4" x 60 ft.	■ 4" or 6" x 30 ft.

General Purpose Vinyl Tape - can be used as color coding, bundling and safety marking, etc.

Everyday Floor Traffic

Reliable, highly visible, highly versatile marking tape.

Vinyl Tape 764
Standard: 2" x 36 yds

766 767

Major Types of Matting Solutions For Commercial / Industrial Settings



■ Commercial Entrance 除污 / 吸水



■ Indoor areas 刮塵 / 吸水



■ Wet areas 排水 / 防滑



■ Work areas 防油 / 防疲勞



■ Food service areas 防油 / 排水



■ Clean room areas 刮塵 / 防污

摺圍欄




JP650 摺疊式活動圍欄
(黃色塑膠料)
650mm(W) x 1010mm(H) x 4摺



JP550 摺疊式活動圍欄
(黃色塑膠料)
1000mm(W) x 770mm(H) x 3摺



JP708 伸縮圍欄
600mm / 展開: 4米
340mm(W) x 1040mm(H)

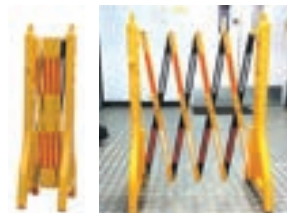

AP1400 注水式塑料伸縮反光圍欄
縮合: 34cm / 展開: 2.5米
96cm(H) · 3kg

▼ 可為客戶訂制印刷圖樣, 按顏色、尺寸及數量 ▼

摺合圍欄 (二/三/四摺)



R01
23-1/2"(W) x 24"(H)
59.7cm(W) x 61cm(H)



R02
22"(W) x 29-1/2"(H)
55.9cm(W) x 75cm(H)



R03
22-1/2"(W) x 39"(H)
57.2cm(W) x 99.1cm(H)



R04
22-1/2"(W) x 39"(H)
570(W) x 990mm(H)



鋁合金伸縮拉閘
高度: 1.8米, 展開長度: 4米
(長度都可以訂造)



AR01 鋁質圍欄
23"(W) x 43"(H)
58.5cm(W) x 109.5cm(H)



特大三摺膠欄
每摺吋: 1000(H) x 1000(W) mm
管架: PP / 布面: 牛津布
(單面絲印)
顏色: 多種選擇



高身四摺膠欄
每摺吋: 1100(H) x 600(W) mm
管架: PP / 布面: 牛津布
(單面絲印)
顏色: 多種選擇

告示架



不鏽鋼A字牌
特別訂造




不鏽鋼插牌A字架
430mm(W) x 560 mm(H)
可更換內容



不鏽鋼小心地滑告示牌
可摺疊, 另有其他內容供選擇
225mm(L) x 300mm(D)
x 600mm (H)



弧型不鏽鋼
小心地滑牌

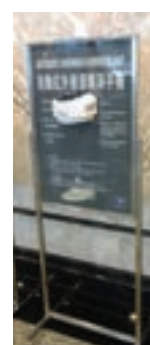

不鏽鋼A1告示架



石屎座
可訂造內容及高度



黃色A字牌
SIZE: 300mm(W) x 610mm(H)



方形告示牌(可加插牌)
高度 675mm / 907mm



橙黃色膠鏈
尺吋: 6mm x 50m
6mm x 25m

雪糕筒

歡迎查詢訂造反光套



750mm / 1000mm(H)
雪糕筒 (橡膠底)
重量: 4.1kgs / 7kg



B字架



700mm(H)
軟身雪糕筒
筒身材質EVA



700mm(H)
軟橡膠
黑底



700mm(H)
軟橡膠



700mm(H)
伸縮雪糕筒
方便收藏



300mm(H)
迷你雪糕筒



770mm方錐型雪糕筒
底座尺寸: 385mm(長) x 385mm(闊)
Weight: 3.6kg
可代印公司Logo

交通柱



TC300
750mm / 1000mm
白色反彈柱 底座可拆開



850mm 反彈交通柱(底座不能分開)
可配全白/紅白或黃黑(箭咀)反光套



TC500 黃黑反光分隔柱
200mm(底座) x 1000mm(高)



立柱型車位鎖
黃/橙色 連配件: 螺絲
(不包括安裝)



Bollard
反光指示路牌
英國製造

拉帶柱



DL22 不鏽鋼雙層欄杆座
可選擇拉帶顏色
900mm(H)



U型疊式拉帶柱
350 x 51 x 880mm
產品淨重 8.0 kg
可選焗漆/不鏽鋼



不鏽鋼拉帶柱
320(dia.) x 900mm(H)
帶長: 2米
*絲印Logo另外報價



不鏽鋼掛繩柱
底盤直徑: 320mm
管粗: 51mm(直徑)
全高: 910mm
帶長1.5米



拉帶柱收集車
方便搬運, 節省人力及時間
可訂造不同尺寸




A3 / A4 不鏽鋼座地告示牌



拉帶柱插牌
A3或A4可選擇



掛牆式拉帶器
不銹鋼掛牆式拉帶器,
6呎長帶, 藍色





SAS 鎖車架(HD1/HD2/HD3/HD3L)
香港運輸處認可
英國製造

HD1

- 電單車/小型私家車適用
1) 軟鈴/金屬圈直徑:10"至15"
2) 輪軌闊度: 110-195mm

HD2

- 電單車/私家車/輕型Van仔適用
- 軟鈴/金屬圈直徑:10"至15"
- 輪軌闊度: 165-225mm

HD3

- 輕型Van仔/小型貨車/小型跑車適用
- 軟鈴/金屬圈直徑:12"至16"
- 輪軌闊度: 165-225mm

HD3L

- 輕型Van仔/小型貨車/小型跑車適用
- 軟鈴/金屬圈直徑:12"至16"
- 輪軌闊度: 200-300mm



SAS NEW DEFENDER 鎖車架


- 1) 軟鈴+輪軌直徑:
至780mm/30.5"
2) 輪軌闊度(接觸地面):
至270mm/10.6"
3) 約13kg




臨時及永久路牌
可訂造不同尺寸及可提供
RA2 標準



減速路拱
黃/黑色橡膠減速大路拱(LG-2)
Size: 500(L) x 430(W) x 50mm(H)

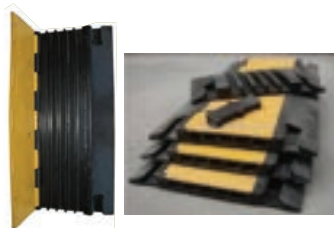

橡膠臨時電線槽
安裝, 拆遷簡易, 堅固耐用
分別有二線 / 三線 / 五線可供選擇

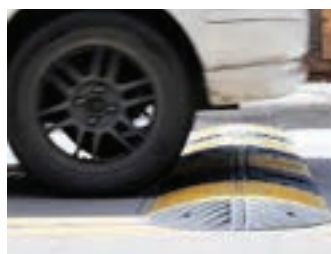

車輛定位器
有不同尺寸及重量
符合不同車輛需要



LG06扁身路拱



橡膠倒車定位器



橡膠反光護角
黃黑色箭咀, 有不同長度
可保護牆角




PVC 防滑級咀
具有絕佳耐磨防滑、吸音功能
有多種規格及顏色, 使用膠水施工



PU警示防撞條
長度1米



PU 護牆角
2000mm 長

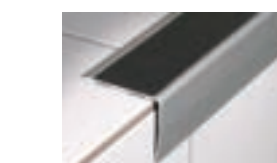

圓型車底鏡12" (直徑)
可伸長0.6至1.3M

LED燈車底鏡
30x30cm
充電式, 可摺疊




魚眼鏡
(可選擇12"/16"/18"/24"/32")
室外(有檔)及室內




球型廣角鏡(室內天花使用)
分別有90度/180度/360度




PVC圍帶
75mm(W) x 500m(L) x 0.07mm (Thickness)
內容顏色可訂造(歡迎查詢)



PVC 高警示橙色圍帶
51mm(W) x 100m(L) x
0.2mm (Thickness)

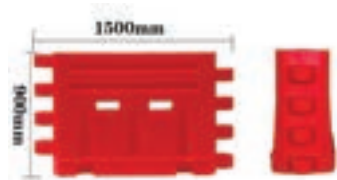

T2 水馬
900mm(H)x1500mm(L)
顏色：紅/白色
符合：BS EN1317-2:2010

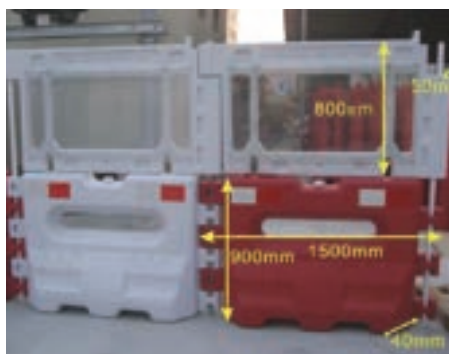

CY03B 水馬
900(H)x1500(L)x400(D)mm
顏色：紅/白色
配白色磨砂面屏風
可配水馬套(可絲印公司Logo)



水馬 WB1800
1800mm(H) x 1000mm(L)
Upper: 50mm(D)
Lower: 430mm(D)



防暴水馬 WB9554
2150(L)x1700(H)mm
Upper: 250(W)mm
Lower: 700(W)mm



WB03B
紅色/白色
1500(L)x920(H)
x350(D)mm



迷你水馬
1083(L)x600(H)
x260(D)mm


欄河



馬路膠欄杆
顏色：紅/白色
1500 / 2000(L)x1000(H)mm
可訂造公司Logo貼紙



馬路膠欄杆
顏色：橙白色
1500 / 2000(L)x1000(H)mm
可訂造公司Logo 貼紙

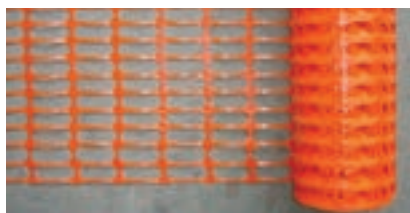

橙色安全圍網
每卷尺寸：1M x 35M




不鏽鋼鐵欄河
可代客特別訂造及絲印Logo



鐵馬套
可代客特別訂造及絲印 Logo



不鏽鋼鐵馬車
方便搬運鐵馬或欄杆

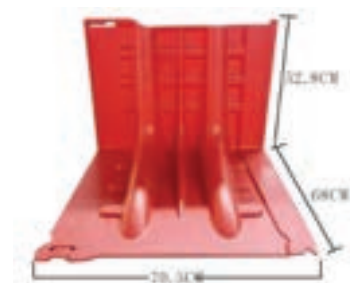

組合式防洪擋水板
特點：高度防水、安裝簡單
快捷、裝卸方便、質量保證



黑色圓形沙包



綠色沙包
長度：8" x12" / 24"
/ 30" / 36"
可訂做其他顏色及
印公司Logo



長方形沙包
10" (W)x12" (L)

照明



Fenix PD25
採用最新的Cree XP-L LED
使用16340可充電鋰離子電池
550流明和427英尺
的光束距離



Fenix WF11E
防爆電筒，通過IECEx、
ATEX和CSA認證
最大亮度為200流明
抗衝擊力達1m，
IP67級防水防塵
3xAAA鹼性電池



Fenix WF30RE
120小時和最大280流明
耐高溫及IP68防水防塵
IECEx、ATEX和CSA認證
連充電電池，USB火牛，
3檔模式



Pelican MityLite 1900
包裝小巧，高強度氬氣燈，產生
強大明亮的光束
可以穿透濃煙、霧氣和灰塵
2xAAA 鹼性電池(包括電池)。
照明距離45M



Energizer XFH 211 LED
具有扭曲可調焦距，
45米光束距離
45小時的運行時間和
50流明的光
方便的端蓋按鈕開關，
單手操作
2xAAA鹼性電池



UltraFire UF-980L
Cree XM-L T6
980流明，鋁合金
18650電一粒，3檔模式
140mm(長)x44mm(直徑)



UltraFire UF-N7
Cree XP-L V6
980流明，可伸縮變焦
18650電一粒，5檔模式
137mm(長)x37mm(直徑)



UltraFire WF-502B
Cree Xm-L T6，防水等級IPX-6
920 流明，100,000小時壽命
3檔模式，鋁合金
135mmx30mmx25mm
照明距離135m
2x18650電池，1x充電器



Pelican Kinglite 4000
高功率聚光燈，ABS樹脂製成
雙燈絲氬氣燈，產生明亮的光束
穿透濃煙、霧氣和灰塵，
ABS樹脂製成
一個備用燈，雙向開關
8D 鹼性電池供電



10" 交通指揮棒



21" 交通指揮棒

頭燈



Energizer HDD323 LED 頭燈
高亮，可調角度，電池(AAAx3)
5種燈光模式，400流明
防水等級 IPX4
85米距離



FENIX HL60R 充電頭燈
950流明
連1粒電芯及充電座
防水等級IPX8



Pelican 2690 LED 頭燈
74流明，電池(AAAx3)
防水等級 IPX7
92米距離
標準Class I/II/III — Division 1



W08 感應頭燈
1000 流明，USB 智能充電
56g重，3檔設計，遠/近/紅光
防水，射程100-300米



太陽能閃燈




馬路閃燈



LED座地/手提燈
連6粒充電芯及叉咀
2400流明，防水等級IP65



車頂LED磁石閃燈
使用AA x 2 粒乾電池



頭燈固定扣夾



彈塑性軟膠物料
三點固定式
可將頭燈穩固在安全帽上

反光/夜光火警告示



夜光火警告示及緊急逃生膠牌
4" x9" 或6" x12"
(還有普通膠貼可供選擇)



緊急照明燈
HI-LUX 6V3L
充電時間：12 / 24 小時
可亮時間：2 / 3 小時
尺寸：270 X 270 X 50MM



LED 緊急出口燈箱
充電 12小時
可亮時間2小時以上



化學及危險品貼紙
4" x4" /6" x6"



安全標貼
貼紙或PVC膠牌
9" x12"



Lockout Station with
Brady Safety Padlocks



Circuit Breaker Lockout



Safety Padlock



Padlock Tags

保安崗位檯

歡迎訂做



物料：不鏽鋼加焗漆
500(W) x 750(L) x 1100(H)mm

玻璃纖維戶外更亭



GH1單人更亭
1210(W) x 1520(L) x 2150(H) mm



GH2 雙人更亭
1520(W) x 2310(L) x 2150(H)mm



易摺合帳篷
1m x 1m x 4m(H)
2m x 2m x 4m(H)
3m x 3m x 4m(H)



帳篷加圍布



訂造款式



太陽傘(DIA 96")
約1.65M(可伸縮)

(可附加圍欄)




鋁合金多功能摺疊式台階
規格：
長：184cm
寬(三層)：每層32cm或45cm
高(一/二/三層)：25cm / 45cm / 65cm



地毯顏色：棗紅或灰(供選擇)
約容納15人(每層可負重 500kg)
台階展開時呈圓弧型



ABS加厚戶外摺疊桌椅
承重：桌面30公斤
每椅90公斤
重量：8公斤

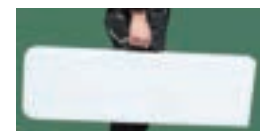

手提摺疊長椅
承重可達400公斤

垃圾筒 / 環保回收箱



不鏽鋼腳踏式垃圾桶
附有塑膠內桶
203x265x290mm 容量: 5L
225x300x355mm 容量: 8L
248x325x400mm 容量: 12L
顏色: 砂鋼 靜音緩降蓋



腳踏式口罩棄置箱
188(L)x335(D)x375(H)mm
容量: 12L
210(L)x380(D)x436(H)mm
容量: 20L
顏色: 白色



(一組三個)

A30室內環保回收箱(層層疊)
395(W)x635(D)x335mm(H)
Capacity: 50L



660L戶外 /
塑膠垃圾桶
可印公司Logo



120L / 240L
戶外垃圾膠桶
可加側面腳踏



長方形不鏽鋼腳踏垃圾桶
405(H)x290(L)x170(W)mm
容量: 8L



不鏽鋼室內搖蓋式垃圾箱
305(W)x645mm(H)



不鏽鋼回收箱
可選3 / 4格
1000(L)x420(W)x910(H)mm



A70 塑膠環保回收桶
340(W)x260(D)x750(H) mm
容量: 68L

雨傘除水器/雨傘架



不鏽鋼雙頭自動雨傘機
Model: EK305
425(L)x290(W)x805mm(H)



雨傘架
50(L)x25(W)x70(H)cm




雨傘架(A)
32(Dia)x106(H)cm



雨傘除水器
820(W)x350(D)x800(H)mm
材質: #304 不鏽砂鋼
附帶: 4個推轆
重量: 22kg, 水箱容量: 4L
產地: 日本


斜坡

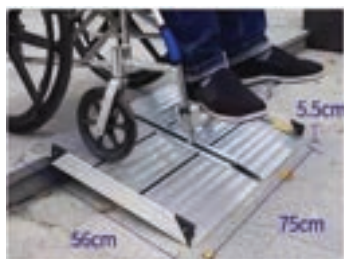

鋁質手提活動斜坡板(摺疊式)
有不同呎吋可供選擇



日本 Dunslope 輕便纖維斜坡板
摺疊式設計, 體積輕巧纖細, 方便攜帶
有不同呎吋可供選擇
負重可高達 300kg



三摺



二摺

Safety Knife 安全剃刀
Made in Japan



SK-4
Auto-Retracting Blade



SK-8
Auto-Retracting Blade



HOK-1
Heavy duty hook cutter



SK-15
Disposable
Concealed blade



SK-9
Auto-Retracting Blade



SK-12
All stainless steel
self-retracting



OLFA SK-10



油壓渠積
1200mm x 1200mm
最高可積起700 kgs



寶露華吹風機
可配5/10米風琴喉
備有地盆用110V
直徑尺寸：
8" / 10" / 12" / 14" / 18" / 20" / 24"



強力地台扇
12/16/18/20"
風力特強，美觀，慳電，耐用



強力吹風機
3段速吹風機(有伸縮手柄及
腳輪)，兩個後轆
POWER: 1000W
45x44x52cm(H)



水管快速收納架連
水槍工具套裝



坐地牛角扇



噴霧風扇
適合戶外及室外場地



水冷移動式環保空調
三面降溫
最大風量：600 M3 / H
耗水量：3-6公升 / 小時
附搖控



太陽能戶外捕蚊蟲機
545X510X390mm
有效覆蓋範圍：
2700平方米



戶外電擊型滅蚊蠅機
400(H)x300(W)x
300(H)mm
有效覆蓋範圍：
1000平方米
黑紫外光燈



蚊怕水



驅蚊帶



驅狗器
保護距離約20呎
已包9V電池



LED個人警報器
ABS 環保材料
130 分貝 67X 45 X 25mm




哨子



自動鞋套機
47(L)X25(D)X17(H)cm



自動擦鞋機



自動擦鞋機



有蓋物流膠箱

物流籠車



物流籠車層板



◀ 物流籠車
提供不同尺寸

保温箱

EPP材質
有不同尺寸選



食品級EPP
鎖住溫度 留住新鮮



抗壓測試
使用壽命長達3-5年



鍍鉻提手
抗拉耐磨損，易手搬運



專營個人防護及工業安全設備用品



交通方法

以下路線落車後步行約5-8分鐘

1. 荳灣港鐵站乘238M巴士(往海濱花園方向) 於荳灣馬頭壩道站下車
2. 荳灣港鐵站乘41M巴士(往青衣邨方向) 於荳灣橫窩仔街站下車
3. 葵芳港鐵站乘87K綠色小巴(往荳灣西鐵站方向) 於荳灣樂悠居站下車
4. 青衣港鐵站乘310M綠色小巴(往海濱花園方向) 於荳灣工業中心站下車
5. 沙田市中心 或 城門隧道轉車站乘49X巴士(往青衣碼頭方向) 於荳灣橫窩仔街站下車
6. 旺角乘238X巴士(往海濱花園方向) 於荳灣龍德街站下車
7. 觀塘乘33巴士(往荳灣西站方向) 於龍德街站下車
8. 灣仔乘930X巴士(往荳灣愉景新城方向) 於龍德街站下車

以下路線落車後步行約10-15分鐘

9. 荳灣西鐵站(D出口) 途經荳灣公園步行約15分鐘
10. 上水總站乘278X巴士(往荳灣如心廣場方向) 於如心廣場站下車, 後步行約10分鐘

滿威有限公司