

2 AAA 電池

本質安全筆型手電筒

XPP-5410G

**NIGHTSTICK**<sup>®</sup>  
Life Depends on Light™

**CLASS I  
DIV 1**

**ATEX  
ZONE 0**

**IP-67  
DUST/WATER  
PROOF**




有條件的終身保固。持久耐用



瞬時或常開功能。僅在需要時使用它，或保持開啟。



流線型一體式口袋夾。堅固的夾子讓您的燈方便又安全。



耐衝擊、耐化學腐蝕，並提供有條件的終身保固。



**30 流明**

1-800-233-2155 · 1-469-326-9400 · [nightstick.com](http://nightstick.com)

© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit [nightstick.com](http://nightstick.com) for product updates.

# 本質安全筆型手電筒

## 2 AAA 電池

### 產品編號 / UPC

- XPP-5410G, UPC 0 1739880298 7

### 市場應用

- 危險工作環境、工業、汽車

### 認證

- CLASS I DIV 1: GRPS A-D T3
- CLASS II & III DIV 1: GRPS E-G T135°C
- CLASS I ZONE 0: AEX IA IIC T3 GA
- CLASS I ZONE 0: EX IA IIC T3 GA
- ATEX CERTIFICATION: I M 1 EX IA OP IS I MA
- ATEX CERTIFICATION: II 1 G EX IA OP IS IIC T3 GA
- IECEX CERTIFICATION: EX IA OP IS I MA
- IECEX CERTIFICATION: EX IA OP IS IIC T3 GA

### 材質

- 工程聚合物

### 手電筒流明 / 工作時間

- 30L, 18 小時 工作時間

### 燭光

- 107

### 光束距離

- 40m

### 防塵 / 防水等級

-ANSI IP-67 防塵 / 防水

### 防墜等級

- 2 meters

### 尺寸

- 長度 : 5.8 in (147 mm)
- 筒身直徑 : 0.7 in (18 mm)
- 筒頭直徑 : 0.9 in (23 mm)
- 重量 : 1.18 oz (33 g)

### 電池


- AAA

### 保固

- 有條件的終身保固

### 內容物

- 手電筒
- 2 AAA 電池

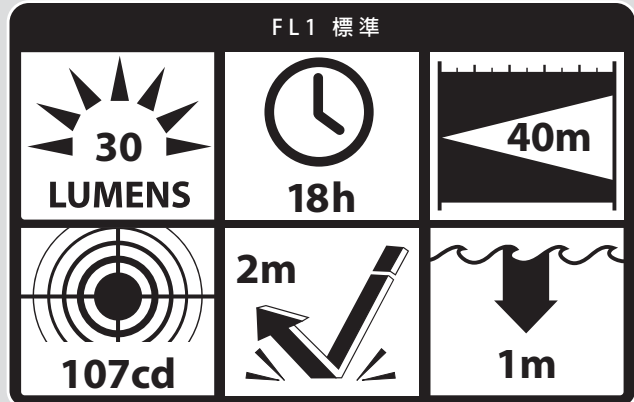

### Permissible XPP-5410 Flashlight Assembly



APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.



Intertek  
ID 4003544  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3  
CLASS II & III DIV 1 GRPS E-G T135C  
CLASS I ZONE 0 AEx ia IIC T3 Ga  
CLASS I ZONE 0 Ex ia IIC T3 Ga  
Ⓜ I M 1 Ex ia op is I Ma  
Ⓜ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma  
Ex ia op is IIC T3 Ga  
Intertek ITS 13 ATEX27839X  
IECEX ITS 14.0036X  
-20°C ≤ Tamb ≤ +40°C  
1.5V/Cell AAA Alkaline



### Conforms to:

ANSI/UL STD 913, ANSI/UL  
60079-0, ANSI/UL 60079-11  
ANSI/ISA 60079-26

### Certified to:

CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

### 認證

